

Pistol Grip Air Screwdrivers


Positive Jaw

20 & 50 Series

Legendary performance in a compact, lightweight package with a well-deserved reputation for durability.

Features

- Torque range: 12 – 120 in-lbs (1.4 – 13.6 Nm)
- Speeds: 800 – 2,600 rpm
- Skinsulate housing provides comfortable grip surface
- One-handed reverse lever
- Torque adjusted by limiting air pressure
- Recommended for applications that require more driving torque than final seating torque



Service and Accessories

Manuals:

- 49999035 20 Series
- 49999093 50 Series
- 49999096 Woodworking screwdriver

Accessories:

- Torque arm: QTA010
- Suspension bail (20 Series): 47795
- Suspension bail (50 Series): 46472
- Spring balancer, see page 177
- Spindle accessories, see page 183

Kits:

- Service kit (20 Series): 46992
- Service kit (50 Series): 47353

Model	in-lbs (Nm)	rpm	lbs (kg)	in (mm)	in (mm)	in	cfm (L/min)
20 SERIES TRIGGER START							
SG022B-26-Q	12 (1.4)	2,600	1.5 (0.7)	5.1" (131)	0.7" (17)	1/4"	15 (420)
SG022B-15-Q	25 (2.8)	1,500	1.6 (0.7)	5.5" (140)	0.7" (17)	1/4"	15 (420)
SG022B-9-Q	38 (4.3)	900	1.6 (0.7)	5.5" (140)	0.7" (17)	1/4"	15 (420)
50 SERIES ANGLE JAW TRIGGER START							
SG052B-25-Q	45 (5.1)	2,500	2.4 (1.1)	7.2" (182)	0.8" (21)	1/4"	25 (720)
SG052B-17-Q	65 (7.3)	1,700	2.6 (1.2)	7.6" (194)	0.8" (21)	1/4"	25 (720)
SG052B-10-Q	90 (10.2)	1,000	2.6 (1.2)	7.6" (194)	0.8" (21)	1/4"	25 (720)
SG052B-8-Q	120 (13.6)	800	2.6 (1.2)	7.6" (194)	0.8" (21)	1/4"	25 (720)
50 SERIES 90 DEGREE JAW TRIGGER START							
SG059B-17-Q	65 (7.3)	1,700	2.6 (1.2)	7.6" (194)	0.8" (21)	1/4"	25 (720)
SG059B-10-Q	90 (10.2)	1,000	2.6 (1.2)	7.6" (194)	0.8" (21)	1/4"	25 (720)
SG059B-8-Q	120 (13.6)	800	2.6 (1.2)	7.6" (194)	0.8" (21)	1/4"	25 (720)
TRIGGER START WOODWORKING SCREWDRIVER							
7672-A18	74 (8.4)	1,800	2.6 (1.2)	6.6" (169)	0.9" (22)	1/4"	27 (720)

Series			
20	76 dBa	1/4" NPT	5/16" (8 mm)
50	78 dBa	1/4" NPT	5/16" (8 mm)

Series			
Woodworking	78 dBa	1/4" NPTF	5/16" (8mm)

Inline Air Screwdrivers

Positive Jaw

20 & 50 Series



Legendary performance in a compact, lightweight package with a well-deserved reputation for durability.

Features

- Torque range: 25 – 120 in-lbs (2.8 – 13.6 Nm)
- Speeds: 800 – 2,500 rpm
- Skinsulate housing provides comfortable grip surface
- Simple push-button reverse
- Recommended for assembly that requires more driving torque than final seating torque


Service and Accessories

Manuals:


	49999035	20 Series
	49999093	50 Series

Accessories:



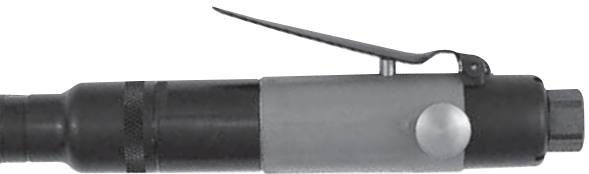










Dead handle: 48931 (50 Series only)
 Suspension bail: 5RL-365
 Piped away exhaust kit: 5L-K184
 Torque arm: QTA010
 Spindle accessories, see page 183



SL022B-9-Q



Positive Jaw

							
Model	in-lbs (Nm)	rpm	lbs (kg)	in (mm)	in (mm)	in	cfm (L/min)
20 SERIES ANGLE JAW							
SL022B-15-Q	25 (2.8)	1,500	1.1 (0.5)	7.0" (178)	0.6" (15)	1/4" 	15 (420)
SL022B-9-Q	38 (4.3)	900	1.1 (0.5)	7.0" (178)	0.6" (15)	1/4" 	15 (420)
50 SERIES ANGLE JAW							
SL052B-25-Q	45 (4.0)	2,500	2.4 (1.1)	8.6" (219)	0.8" (21)	1/4" 	25 (720)
SL052B-17-Q	65 (7.3)	1,700	2.6 (1.2)	9.1" (232)	0.8" (21)	1/4" 	25 (720)
SL052B-10-Q	90 (10.2)	1,000	2.6 (1.2)	9.1" (232)	0.8" (21)	1/4" 	25 (720)
SL052B-8-Q	120 (13.6)	800	2.6 (1.2)	9.1" (232)	0.8" (21)	1/4" 	25 (720)

Series			
20	76 dBA	1/4" NPT	5/16" (8mm)
50	78 dBA	1/4" NPT	5/16" (8mm)