

# DC Electric Screwdrivers

## SE Series Screwdrivers

### High Torque

Model No.	Free Speed rpm	Torque Range		Tool Length		Tool Length		Weight		Bit Size in.
		in.-lbs	Nm	in.	mm	in.	mm	lbs	kg	
<b>Straight Push-To-Start</b>										
				<b>A1</b>		<b>B1</b>				
SPE15B-20-Q	2000	5.0-15.0	.56-1.69	10.75	273	11.25	286	0.25	0.11	1.6
SPE15B-10-Q	1000	5.0-15.0	.56-1.69	10.75	273	11.25	286	0.25	0.11	1.6
SPE26B-12-Q	1200	11.0-26.0	1.24-2.94	10.75	273	11.25	286	0.25	0.11	1.6
SPE26B-7-Q	700	11.0-26.0	1.24-2.94	10.75	273	10.75	273	0.25	0.11	1.6
SPE26B-3-Q	300	11.0-26.0	1.24-2.94	10.75	273	11.25	286	0.25	0.11	1.6
<b>Straight Lever Start</b>										
SLE15B-20-Q	2000	5.0-15.0	.56-1.69	10.75	273	11.25	286	0.25	0.11	1.63
SLE15B-10-Q	1000	5.0-15.0	.56-1.69	10.75	273	11.25	286	0.25	0.11	1.63
SLE26B-12-Q	1200	11.0-26.0	1.24-2.94	10.75	273	11.25	286	0.25	0.11	1.63
SLE26B-7-Q	700	11.0-26.0	1.24-2.94	10.75	273	11.25	286	0.25	0.11	1.63
SLE26B-3-Q	300	11.0-26.0	1.24-2.94	10.75	273	11.25	286	0.25	0.11	1.63
<b>Trigger Start With Pistol Attachment</b>										
STE40B-7-Q	700	18.0-40.0	2.03-4.52	10.75	273	11.25	286	0.25	0.11	1.83
<b>Push-to-Start With Pistol Attachment</b>										
SPE40B-7-Q	700	18.0-40.0	2.03-4.52	10.75	273	11.25	286	0.25	0.11	1.83

### Low Torque

Model No.	Free Speed rpm	Torque Range		Tool Length		Tool Length		Weight		Bit Size in.
		in.-lbs	Nm	in.	mm	in.	mm	lbs	kg	
<b>Straight Lever Start (Controller Required)<sup>1</sup></b>										
				<b>A1</b>		<b>B1</b>				
SLE01A-9-W	650-950	0.26-1.3	0.03-0.15	8.63	219	9.25	235	0.7	0.32	0.16
SLE04A-10-Q (C)	750-1000	0.44-4.79	0.05-0.54	8.63	219	9.25	235	0.8	0.36	0.25
SLE10A-7-Q (C)	500-700	1.74-10.44	0.20-1.18	8.63	219	9.25	235	0.8	0.36	0.25

(1) Two clutch springs are furnished to cover torque range. Tool is shipped with heavier clutch spring installed. (C) Class 100 Clean Room Models.


### Controller for Low Torque Models

Model No.	Input Voltage	Output Voltage	Weight		Size (in.) L x W x H	Soft Start	Speed Adjustment
			lbs	kg			
SEC24N	115	24	5.1	2.3	10.5 x 3.25 x 4.1	Yes	Yes

### Angle Screwdrivers

Model No.	Free Speed rpm	Torque Range		Weight		Head Length		Side to Center		Height	
		in.-lbs	Nm	lbs	kg	in.	mm	in.	mm	in.	mm
<b>1/4" Square Drive</b>											
						<b>A</b>		<b>B</b>		<b>C</b>	
SLE15B-10-2S5	650	6-23	.68-2.6	2.2	1.0	17.64	448	0.52	13.2	1.73	43.94
SLE26B-12-2S5	800	12-36	1.36-4.07	2.2	1.0	17.64	448	0.52	13.2	1.73	43.94
STE40B-7-2S5	450	15-56	1.69-6.33	2.2	1.0	17.64	448	0.52	13.21	1.73	43.94
<b>1/4" Female Hex head</b>											
SLE15B-10-2S3	650	6-23	.68-2.6	2.2	1.0	17.64	448	0.52	13.21	1.73	43.94
SLE26B-12-2S3	800	12-36	1.36-4.07	2.2	1.0	17.64	448	0.52	13.21	1.73	43.94
STE40B-7-2S3	450	15-56	1.69-6.33	2.2	1.0	17.64	448	0.52	13.21	1.73	43.94
<b>1/4" Square Drive Aerospace Head<sup>2</sup></b>											
SLE15B-20-1S5	1850	5-14	.56-1.58	2	0.9	17.45	443	0.33	8.38	1.47	37.34
SLE15B-10-1S5	950	4-17	.45-1.92	2	0.9	17.45	443	0.33	8.38	1.47	37.34
SLE26B-12-1S5	1100	10-26	1.13-2.94	2	0.9	17.45	443	0.33	8.38	1.47	37.34

(2) This head is designed for close quarter applications. Not intended for extensive counterclockwise use. Angle Heads can rotate 360° for application adjustment. Torque output will vary with application.

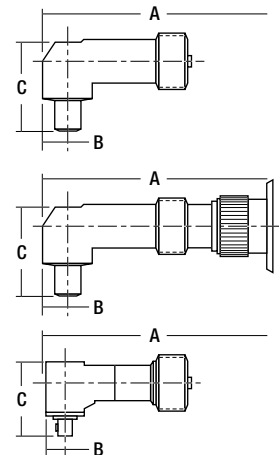

**Notes:**  
SE Series Screwdriver models are UL-listed. Your distributor or ARO representative can provide details.