

Screwdrivers and Nutsetters

Torque Output: 3 to 100 in.-lbs (.34 to 11.3 Nm)



AG028A-15-Q



AG058A-10-Q

Reversible Pistol Grip Screwdrivers

Model No.	Free Speed rpm	Torque Range-Soft Draw						Tool Length		Spindle Offset		Tool Weight		@ Free Speed		
		Spring		Spring		Spring		in.	mm	in.	mm	lbs	kg	Air Cons.	Sound Level	
		in.-lbs	Nm	in.-lbs	Nm	in.-lbs	Nm						cfm	L/s	dB(A)	
Series 20		Brown		Green		Red										
Push-to-Start																
AG024A-26-Q	2,600	-	-	-	-	3-10	.34-1.1	7.875	200	0.662	17	1.76	0.78	15	7	76
AG024A-15-Q	1,500	-	-	8-20	.9-2.3	3-10	.34-1.1	8.250	210	0.662	17	1.86	0.85	15	7	76
AG024A-9-Q	900	10-30	1.1-3.4	8-20	.9-2.3	3-10	.34-1.1	8.250	210	0.662	17	1.86	0.85	15	7	76
AG024A-8-Q	800	12-40	1.4-4.5	10-26	1.1-2.9	4-13	.5-1.5	8.250	210	0.662	17	1.86	0.85	15	7	76
Trigger Start																
AG027A-26-Q	2,600	-	-	-	-	3-10	.34-1.1	7.875	200	0.662	17	1.76	0.78	15	7	76
AG027A-15-Q	1,500	-	-	8-20	.9-2.3	3-10	.34-1.1	8.250	210	0.662	17	1.86	0.85	15	7	76
AG027A-9-Q	900	10-30	1.1-3.4	8-20	.9-2.3	3-10	.34-1.1	8.250	210	0.662	17	1.86	0.85	15	7	76
AG027A-8-Q	800	12-40	1.4-4.5	10-26	1.1-2.9	4-13	.5-1.5	8.250	210	0.662	17	1.86	0.85	15	7	76
Trigger Permit																
AG028A-26-Q	2,600	-	-	-	-	3-10	.34-1.1	7.875	200	0.662	17	1.76	0.78	15	7	76
AG028A-15-Q	1,500	-	-	8-20	.9-2.3	3-10	.34-1.1	8.250	210	0.662	17	1.86	0.85	15	7	76
AG028A-9-Q	900	10-30	1.1-3.4	8-20	.9-2.3	3-10	.34-1.1	8.250	210	0.662	17	1.86	0.85	15	7	76
AG028A-8-Q	800	12-40	1.4-4.5	10-26	1.1-2.9	4-13	.5-1.5	8.250	210	0.662	17	1.86	0.85	15	7	76
Series 50		Yellow		Brown		Green										
Push-to-Start																
AG054A-24-Q	2,400	-	-	-	-	15-40	1.7-4.5	8.375	212	0.865	22	2.70	1.20	25	12	80
AG054A-16-Q	1,600	-	-	25-60	2.8-6.8	15-40	1.7-4.5	8.875	225	0.865	22	2.90	1.29	25	12	80
AG054A-10-Q	1,000	35-80	4.0-9.0	25-60	2.8-6.8	15-40	1.7-4.5	8.875	225	0.865	22	2.90	1.29	25	12	80
AG054A-8-Q	800	35-100	4.0-11.3	25-60	2.8-6.8	15-40	1.7-4.5	8.875	225	0.865	22	2.90	1.29	25	12	80
Trigger Start																
AG057A-24-Q	2,400	-	-	-	-	15-40	1.7-4.5	8.375	212	0.865	22	2.70	1.20	25	12	80
AG057A-16-Q	1,600	-	-	25-60	2.8-6.8	15-40	1.7-4.5	8.875	225	0.865	22	2.90	1.29	25	12	80
AG057A-10-Q	1,000	35-80	4.0-9.0	25-60	2.8-6.8	15-40	1.7-4.5	8.875	225	0.865	22	2.90	1.29	25	12	80
AG057A-8-Q	800	35-100	4.0-11.3	25-60	2.8-6.8	15-40	1.7-4.5	8.875	225	0.865	22	2.90	1.29	25	12	80
Trigger Permit																
AG058A-24-Q	2,400	-	-	-	-	15-40	1.7-4.5	8.375	212	0.865	22	2.70	1.20	25	12	80
AG058A-16-Q	1,600	-	-	25-60	2.8-6.8	15-40	1.7-4.5	8.875	225	0.865	22	2.90	1.29	25	12	80
AG058A-10-Q	1,000	35-80	4.0-9.0	25-60	2.8-6.8	15-40	1.7-4.5	8.875	225	0.865	22	2.90	1.29	25	12	80
AG058A-8-Q	800	35-100	4.0-11.3	25-60	2.8-6.8	15-40	1.7-4.5	8.875	225	0.865	22	2.90	1.29	25	12	80

• Most popular model.

Air Inlet – 1/4" NPTF

Recommended Air Pressure – 90 PSI (6.2 bar)

Recommended Hose Size – 5/16" (8mm) I.D.

Note: The torque values shown for a given model indicate the clutch spring(s) included with the tool. Torque value in bold type indicates the standard spring equipped in the clutch.

Screwdrivers and Nutsetters

Torque Output: 3 to 100 in.-lbs (.34 to 11.3 Nm)

Ordering Information

Tools are equipped with a Quick-Change Assembly (-Q Drive Option) as standard. To order a tool equipped with a (FINDER) option, specify the following option at no extra cost:

- Standard Length Finder.**


Change the “-Q” in the model number to “-F” and specify one of the FINDER KITS listed in the chart at right.

Note: Apex Magnetic Bit Holder (40259), and Magna Magnetic Bit Holder (36585) may be ordered separately.

Example: AS028A-15-F with 46343-4. Order bit separately.



Quick-Change Assembly (Q)



Standard Length Finder (F)

Finder Kit	Screw Size		Bit to Use Order Separately
	Flat head	Round head	
46343-1	1	2	F164
46343-2	2	3	F1645
46343-3	3	4	XF165
46343-4	4	5	XF166
46343-5	5	6	XF167
46343-6	6	8	XF168
46343-8	8	10	XF169
46343-10	10	12	XF1610

Note: Tools ordered with the **Finder Option** will not accommodate the “-Q”, option. Consult factory.



SA024C-9-Q



AS028A-15-Q



AS054C-10-Q

Reversible In-Line Screwdrivers

Model No.	Free Speed rpm	Torque Range-Soft Draw						Tool Length		Spindle Offset		Tool Weight		@ Free Speed		
		Spring		Spring		Spring		in.	mm	in.	mm	lbs	kg	Air Consp. cfm	L/s	Sound Level dB(A)
		Brown		Green		Red										
Series 20																
Push-to-Start																
SA024C-26-Q	2,600	-	-	-	-	3-10	.34-1.1	8.25	210	0.6	15	1.20	0.5	15	7	76
SA024C-15-Q	1,500	-	-	8-20	.9-2.3	3-10	.34-1.1	8.625	219	0.6	15	1.30	0.6	15	7	76
SA024C-9-Q	900	10-30	1.1-3.4	8-20	.9-2.3	3-10	.34-1.1	8.625	219	0.6	15	1.30	0.6	15	7	76
SA024C-8-Q	800	12-40	1.4-4.5	10-26	1.1-2.9	4-13	.5-1.5	8.625	219	0.6	15	1.30	0.6	15	7	76
Lever Permit																
AS028A-26-Q	2,600	-	-	-	-	3-10	.34-1.1	9.062	230	0.6	15.2	1.40	0.63	15	7	73.6
AS028A-15-Q	1,500	-	-	8-20	.9-2.3	3-10	.34-1.1	9.473	240	0.6	15.2	1.50	0.68	15	7	73.6
AS028A-9-Q	900	10-30	1.1-3.4	8-20	.9-2.3	3-10	.34-1.1	9.473	240	0.6	15.2	1.50	0.68	15	7	73.6
AS028A-8-Q	800	12-40	1.4-4.5	10-26	1.1-2.9	4-13	.5-1.5	9.473	240	0.6	15.2	1.50	0.68	15	7	73.6
Series 50																
Push-to-Start																
SA054C-25-Q	2,500	-	-	-	-	15-40	1.7-4.5	9.75	248	0.865	22	2.60	1.2	25	12	80
SA054C-17-Q	1,700	-	-	25-60	2.8-6.8	15-40	1.7-4.5	10.25	260	0.865	22	2.80	1.3	25	12	80
SA054C-10-Q	1,000	35-80	4.0-9.0	25-60	2.8-6.8	15-40	1.7-4.5	10.25	260	0.865	22	2.80	1.3	25	12	80
SA054C-8-Q	800	35-100	4.0-11.3	25-60	2.8-6.8	15-40	1.7-4.5	10.25	260	0.865	22	2.80	1.3	25	12	80
Lever Permit																
AS058A-25-Q	2,500	-	-	-	-	15-40	1.7-4.5	10.437	265	0.865	22	2.80	1.26	25	12	75.8
AS058A-17-Q	1,700	-	-	25-60	2.8-6.8	15-40	1.7-4.5	10.937	278	0.865	22	3.00	1.36	25	12	75.8
AS058A-10-Q	1,000	35-80	4.0-9.0	25-60	2.8-6.8	15-40	1.7-4.5	10.937	278	0.865	22	3.00	1.36	25	12	75.8
AS058A-8-Q	800	35-100	4.0-11.3	25-60	2.8-6.8	15-40	1.7-4.5	10.937	278	0.865	22	3.00	1.36	25	12	75.8

• Most popular model.

Air Inlet – 1/4" NPTF

Recommended Air Pressure – 90 PSI (6.2 bar)

Recommended Hose Size – 9/16" (8mm) I.D.

Note: The torque values shown for a given model indicate the clutch spring(s) included with the tool. Torque value in bold type indicates the standard spring equipped in the clutch.

Screwdrivers and Nutsetters

Torque Output: 3 to 130 in.-lbs (.30 to 14.7 Nm)

Ordering Information

Specify the Base Model Number for the tool with the desired free speed and torque range from the charts below. Add the appropriate Dash No. / Letter to indicate one of the following Drive Options:

- **1/4" Square Drive.**
Add "-1" to the end of the base model number. Not available on Models AR058A-6H(-).
- **3/8" Square Drive.**
Add "-2" to the end of the base model number. Not available on Models AR028A(-)L(-).
- **1/4" Female Hex Bit Holder.**
Add "-H" to the end of the base model number.
- **Standard Length Finder.**
Add "-F" to the end of the base model number and Not available on Models AR028A(-)L(-).


Example: AR028A-48L-1

Right Angle Heads available:

- "L" – Light Duty (aircraft head)
- "R" – Regular Duty
- "H" – Heavy Duty



AR028A-14L-H

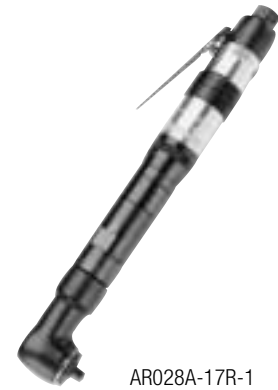

AR028A-17R-1



AR058A-16R-2



AR058A-16R-1

Reversible Right Angle Screwdrivers and Nutsetters

Model No.	Free Speed rpm	Torque Range-Soft Draw						Tool Length		Spindle Offset		Tool Weight		@ Free Speed		
		Spring		Spring		Spring		in.	mm	in.	mm	lbs	kg	Air Consp. cfm	Sound Level L/s dB(A)	
Series 20		Brown		Green		Red										
Lever Throttle																
AR028A-48L(-)	4,800	-	-	-	-	3-7	.30-.80	12.9	328	0.33	8.3	2.20	1.0	15	7	76
AR028A-25L(-)	2,500	-	-	-	-	5-10	.60-1.1	12.9	328	0.33	8.3	2.20	1.0	15	7	76
AR028A-14L(-)	1,425	-	-	8-20	.9-2.3	5-10	.60-1.1	13.3	338	0.33	8.3	2.30	1.0	15	7	76
AR028A-9L(-)	875	10-30	1.1-3.4	8-20	.9-2.3	5-10	.60-1.1	13.3	338	0.33	8.3	2.30	1.0	15	7	76
AR028A-17R(-)	1,750	-	-	-	-	7-16	.80-1.8	11.9	302	0.58	14.8	2.21	1.0	15	7	76
AR028A-10R(-)	1,000	-	-	10-26	1.1-2.9	7-16	.80-1.8	11.9	302	0.58	14.8	2.30	1.0	15	7	76
AR028A-5R(-)	500	15-40	1.7-4.5	10-26	1.1-2.9	7-16	.80-1.8	12.4	315	0.58	14.8	2.30	1.0	15	7	76
Series 50		Yellow		Brown		Green										
Lever Throttle																
AR058A-24R(-)	2,400	-	-	-	-	20-40	2.2-4.5	13.5	343	0.58	14.7	3.60	1.6	25	12	80
AR058A-16R(-)	1,650	-	-	-	-	25-58	2.8-6.5	13.5	343	0.58	14.7	3.60	1.6	25	12	80
AR058A-9R(-)	950	-	-	25-90	2.8-10.2	25-58	2.8-6.5	14.0	356	0.58	14.7	3.80	1.7	25	12	80
AR058A-6H(-)	600	35-130	4.0-14.7	23-81	2.6-9.2	23-52	2.6-5.9	14.2	360	0.65	16.5	4.00	1.8	25	12	80

Air Inlet – 1/4" NPTF

Recommended Air Pressure – 90 PSI (6.2 bar)

Recommended Hose Size – 5/16" (8mm) I.D.

Note: The torque values shown for a given model indicate the clutch spring(s) included with the tool. The torque value in bold type indicates the standard spring equipped in the clutch.