

**Orbital Sanders**


.3 HP (.2 kW)

Capacity: 3 2/3" x 9" Paper Size


- Compact size and light weight are ideal for sanding restricted areas or vertical surfaces.
- Low vibration and palm grip provide comfortable operation and minimize operator fatigue.
- Quick-change clamps enable fast, easy paper changes.

**Standard Equipment**

- Sanding Back-Up Pad

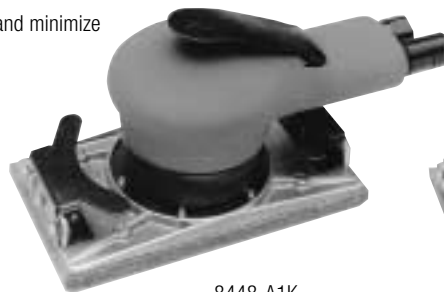

8448-A1K

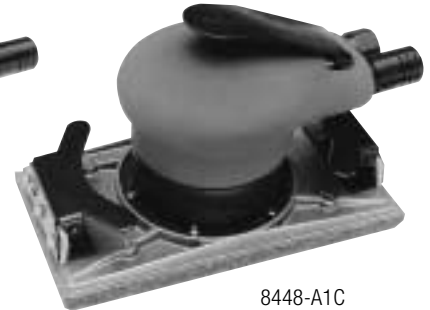

8448-A1C

Model No.		Thickness		Pad Material	Free Speed rpm	Exhaust Location	Orbit Dia.		Air Cons. @ Free Speed		Sound Level @ Free Speed		Weight Part No.
Palm Grip	Long Handle	in.	mm				in.	mm	cfm	L/s	dBA		
<b>With Cushion Grip Sleeve</b>													
• 8448-A1C	8448-A1K	5/16	8	Felt	8000	Rear	.2	5.1	20	9	81	44570	
• 8448-A3C	8448-A3K	1/2	13	Sponge Rubber	8000	Rear	.2	5.1	20	9	81	44571	

- Most popular models

Description	Tool Height		Tool Weight	
	in.	mm	lbs	kg
Palm Grip	3.8	98	3.5	1.6
Long Handle	3.8	98	3.8	1.7

**Extra Cost Accessories**

For Model	Part No.	Description
8448	44360-()	Piped Exhaust Assembly

Air Inlet: 1/4" NPT Female  
 Recommended Air Pressure: 90 PSI (6.2 bar)  
 Recommended Hose Size: 5/16" (8mm) I.D.