

# Elite, Jet Vac and Classic Line Random Orbital Sanders

## Finishing Tools

### Elite Model Specifications

Model No.	Shroud Style	Pad Size		Pad Face	Rated Max Free Speed rpm	Power hp	Air Cons. @ Free Speed scfm	Spindle Thread (Female)	Weight	
		in.	mm						lbs	kg
<b>Non-Vacuum</b>										
RS23A-PLV	Long	3.5	89	Vinyl	12,000	.20	15.8	5/16"-24	1.77	.80
RS25A-PSD	Short	5	127	Duck	12,000	.20	15.8	5/16"-24	1.83	.83
• RS25A-PSV	Short	5	127	Vinyl	12,000	.20	15.8	5/16"-24	1.83	.83
RS26A-PSD	Short	6	152	Duck	12,000	.20	15.8	5/16"-24	1.92	.87
• RS26A-PSV	Short	6	152	Vinyl	12,000	.20	15.8	5/16"-24	1.92	.87
<b>Vacuum-Ready</b>										
RS23A-CLV	Long	3.5	89	Vinyl	12,000	.20	15.8	5/16"-24	1.77	.80
• RS25A-CSV	Short	5	127	Vinyl	12,000	.20	15.8	5/16"-24	1.83	.83
RS25A-CLV	Long	5	127	Vinyl	12,000	.20	15.8	5/16"-24	1.92	.87
RS26A-CSV	Short	6	152	Vinyl	12,000	.20	15.8	5/16"-24	1.92	.87
RS26A-CLV	Long	6	152	Vinyl	12,000	.20	15.8	5/16"-24	1.92	.87
<b>Jet Vac</b>										
RS23A-VLV	Long	3.5	89	Vinyl	12,000	.20	15.8	5/16"-24	1.86	.84
• RS25A-VLV	Long	5	127	Vinyl	12,000	.20	15.8	5/16"-24	1.92	.87
RS26A-VLV	Long	6	152	Vinyl	12,000	.20	15.8	5/16"-24	1.92	.87

- Most popular model

Sanding pads have industry-standard hole pattern for "thru-the-pad" vacuum pickup. For use with coated sanding discs with pre-punched holes.


Air Inlet: 1/4" NPT Female Recommended Air Pressure: 90 PSI (6.2 bar) Recommended Hose Size: 5/16" (8mm) I.D.

## CLASSIC™ LINE



Proven throughout thousands of industrial finishing applications, ARO has now refined its popular Classic Line models with stronger internal components, improved shrouds, and more efficient vacuum action. The "ARO red" cushion grip fits snugly over the aluminum housing, and provides a comfortable grip surface for the operator. ARO offers Classic Line models in standard size as well as "mini" size housings.

You can select non-vacuum models, vacuum-ready models for use with central or portable vacuum systems, and venturi-vacuum models with a self-contained hose and collection bag in the Classic Line. Classic Standard Non-vacuum models can be converted to vacuum-ready status with an available conversion kit. Refinements to shrouds and port diameters have not only improved vacuum performance, but have also reduced weight and sound levels. And, as with all ARO random orbital sanders, the Classic Line models require no lubrication, and are backed by an exclusive two-year warranty.

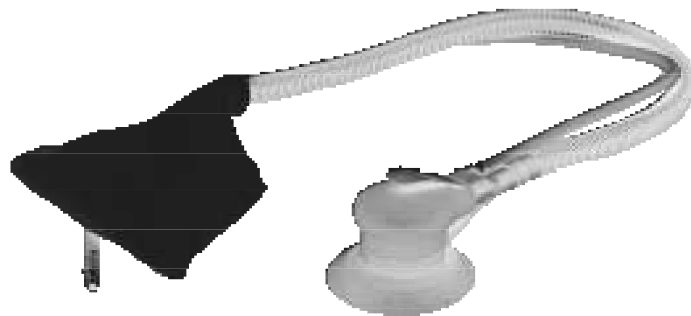

### ARO Classic Line Model Identification Guide

Example: 8416-B5T-V

