
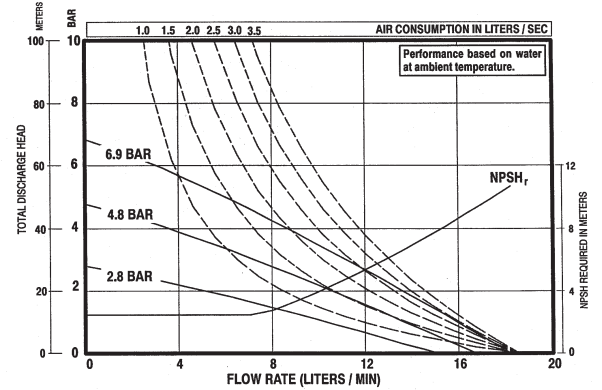
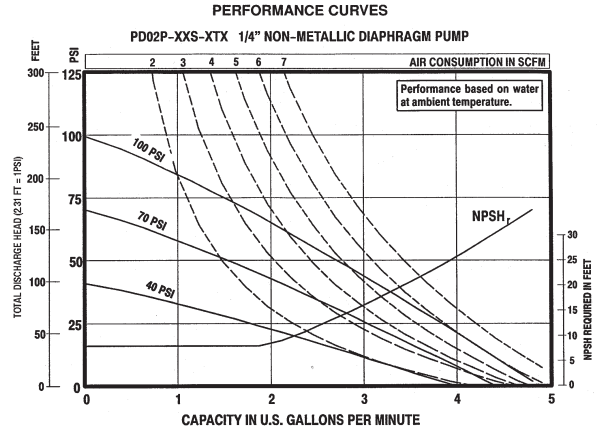


Performance Specifications

RATIO:	1:1
MAXIMUM G.P.M. (LPM):	4.6 (17.4)
DISPLACEMENT GALLONS (Liters) PER CYCLE:	.014 (.053)
AIR INLET:	1/4" NPTF (f)
FLUID INLET:	3/8" NPTF (f)
FLUID OUTLET:	1/4" NPTF (f)
MAX. OPERATING PRESSURE PSI (bar):	100 (6.8)
SUSPENDED SOLIDS MAX. DIA. IN. (mm):	Clean Fluid Only
WEIGHT - LBS. (KGS):	4.1 (1.85) Poly, 4.6 (2.10) Acetal, 9.5 (4.3) Kynar® (PVDF)
MAX. DRY SUCTION LIFT:	20 ft.

Dimensional Data

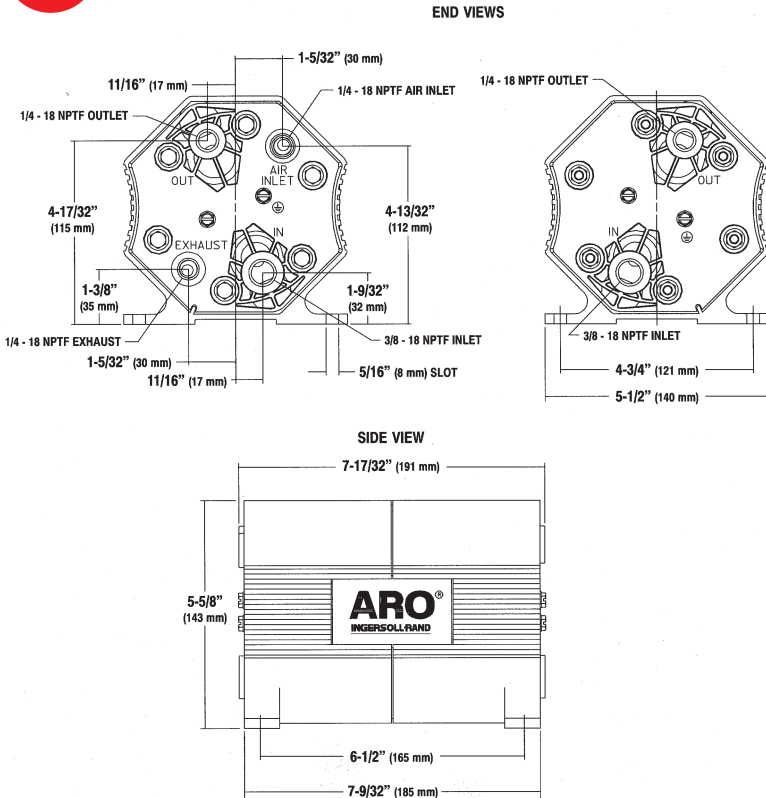

Accessories

Recommended Filter/Regulator (See Page 38)

Filter / Regulator: P29122-600

For complete airline connection kit, see page 34, item "B". Pulsation Dampener, see page 24.

For Diaphragm Pump Accessories see pages 34-36.


For recommended key models, refer to the ARO diaphragm pump price book (Form 2240-2). If the specific model you seek is not in the price book, consult the factory for further selection assistance.



P29122-600

Ordering

Best Selling Models | PD02P-APS-PTA, PD02P-APS-PTT, PD02P-ADS-DTT, PD02P-AKS-KTT

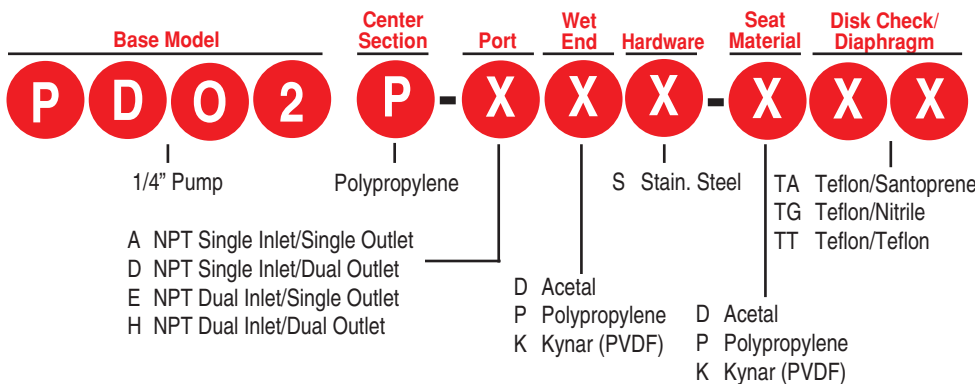

360°
mounting
versatility!



One Aro Center | P.O. Box 151 | Bryan, Ohio 43506-0151
(419) 636-4242 | (419) 633-1674 Fax | www.arozone.com