
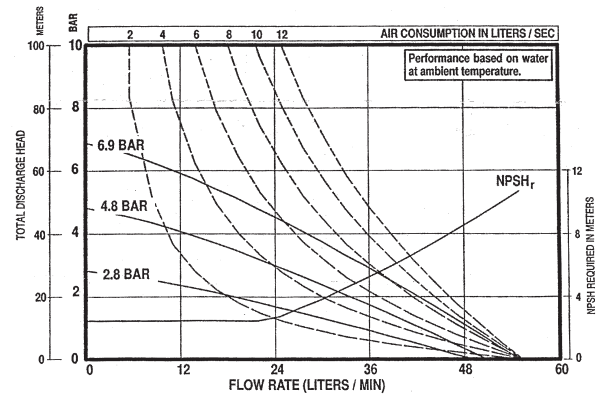
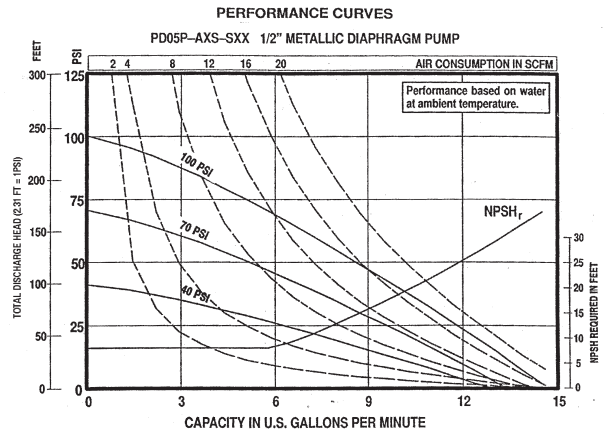


Performance Specifications

RATIO:	1:1
MAXIMUM G.P.M. (LPM):	13 (49)
DISPLACEMENT GALLONS (Liters) PER CYCLE:	.040 (.15)
AIR INLET:	1/4"-18 NPTF (f)
FLUID INLET:	1/2"-14 NPTF (f)
FLUID OUTLET:	1/2"-14 NPTF (f)
MAX. OPERATING PRESSURE PSI (bar):	100 psi (6.9 bar)
SUSPENDED SOLIDS MAX. DIA. IN. (mm):	3/32" (2.4mm)
WEIGHT - LBS. (Kg):	14.6 lbs (6.6 kgs) SST, 8.4 lbs (3.8 kgs) Alum
MAX DRY SUCTION LIFT:	10 ft. (Teflon fitted)

Dimensional Data

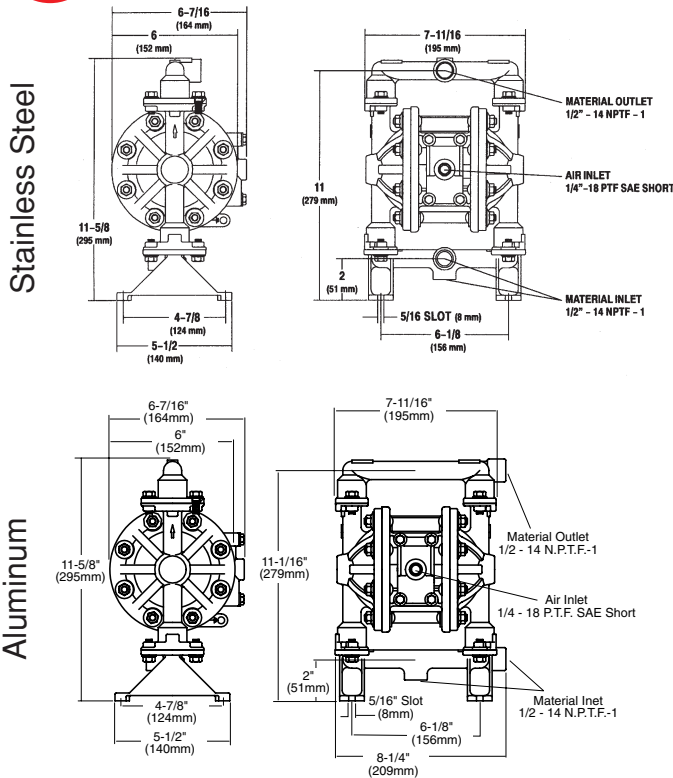

Accessories

Recommended Filter/Regulator
(See Page 38)

Filter / Regulator: P29122-600


For complete airline connection kit, see page 34, item "B".
Pulsation Dampener, see page 24.



For Diaphragm Pump Accessories see pages 34-36.

For recommended key models, refer to the ARO diaphragm pump price book (Form 2240-2). If the specific model you seek is not in the price book, consult the factory for further selection assistance.

Ordering Best Selling Models | PD05-ASS-SAA, PD05P-ASS-STT, PD05P-ASS-SXX, PD05P-AAS-PGG

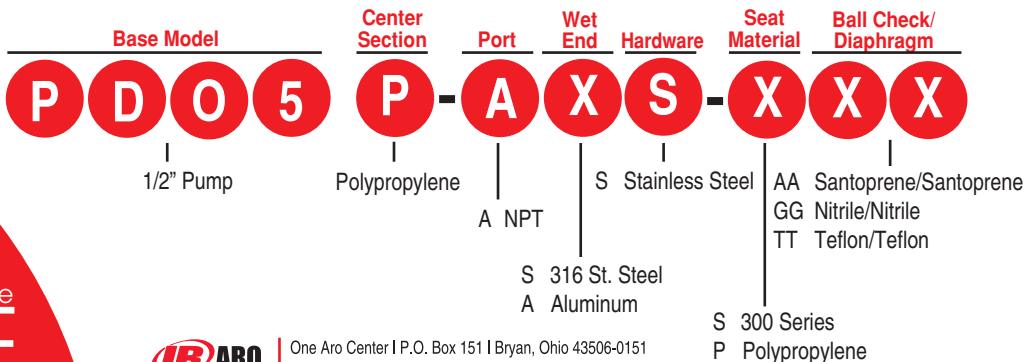

Perfect for rugged applications.

