

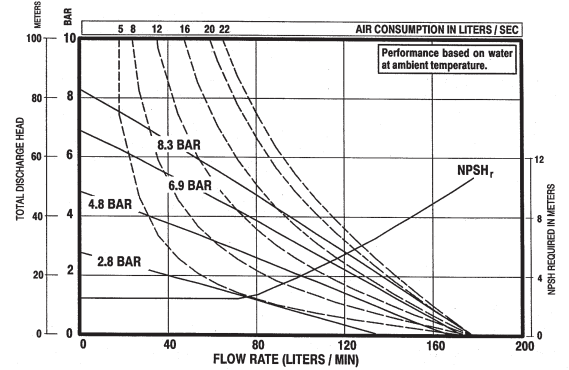


Performance Specifications

RATIO:	1:1
MAXIMUM G.P.M. (LPM):	47 (178)
DISPLACEMENT GALLONS (Liters) PER CYCLE:	.170 (.64)
AIR INLET:	1/4" NPTF (f)
FLUID INLET:	ANSI Class 150, 1" Pipe Flange
FLUID OUTLET:	ANSI Class 150, 1" Pipe Flange
MAX. OPERATING PRESSURE PSI (bar):	120 (8.3)
SUSPENDED SOLIDS MAX. DIA. IN. (mm):	1/8-inch (3.2)
WEIGHT - LBS. (Kg):	20.2 (9.2) Polypropylene 28.5 (12.9) Kynar® (PVDF) For Cast Iron center section models, add 8.5 lbs. (3.81 kg.)
MAX. DRY SUCTION LIFT:	15 ft. (Rubber fitted)

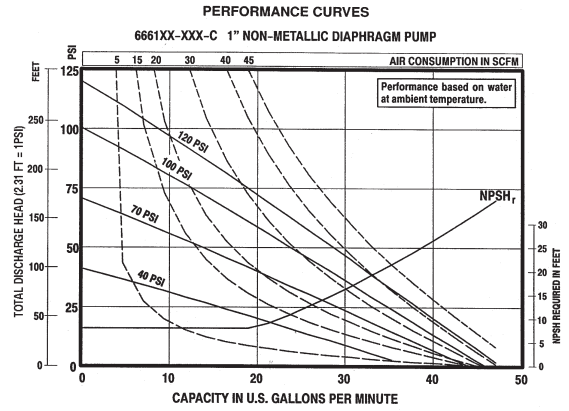

Dimensional Data

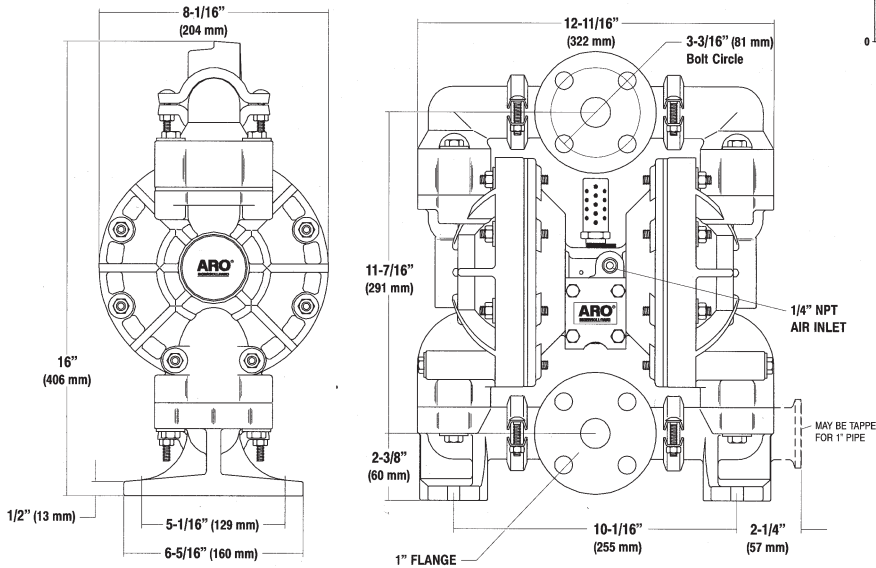

Accessories

Recommended Filter/Regulator
(See Page 38)

Filter / Regulator: P29221-610
67078 - Polypropylene Flange Kit 1" NPT (F)



P29221-610

For complete airline connection kit, see page 34, item "B".
Pulsation Dampener, see page 24.

For Diaphragm Pump Accessories see pages 34-36.

For recommended key models, refer to the ARO diaphragm pump price book (Form 2240-2). If the specific model you seek is not in the price book, consult the factory for further selection assistance.

Ordering

Best Selling Models | 6661A3-3EB-C, 6661A3-344-C, 6661B3-344-C, 6661A4-444-C

All hardware is 300 Series Stainless Steel.

Base Model	Air Motor	Wetted Parts	Check Valve Seats	Ball Check/Diaphragm	
6 6 6 1	X	X	-	X X X	
 1" Pump	 A Aluminum B Cast Iron	 3 Polypropylene 4 Kynar (PVDF)	 3 Polypropylene 4 Kynar (PVDF) 8 Stainless Steel (400, hardened)	 22 Nitrile/Nitrile 33 Viton/Viton 44 Teflon/Teflon EB Santoprene/Santoprene	

Perfect for aggressive chemicals

