


Pump Performance

Air Inlet Pressure Range 30 - 120 PSI (2 - 8.3 bar)
 Fluid Pressure Range 270 - 1350 PSI (18.3 - 91.8 bar)
 Max. Rec'd Cycles Per Minute . 60
 Displacement Per Cycle 11 in³ (180.2 cm³)
 Cycles Per Gallon (Liter) 21 (5.5)
 Flow @ 60 Cycles / Minute 2.8 GPM (10.5 lpm)
 Noise Level @ 60 Psi 80 db(A)

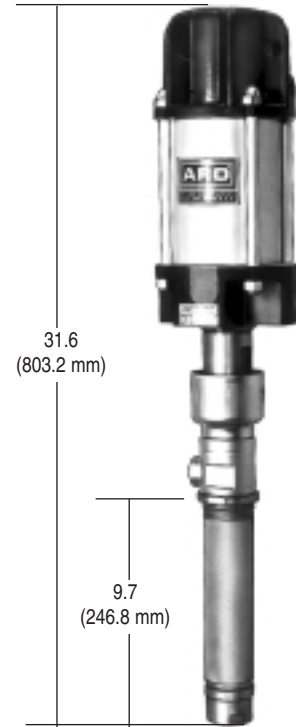

650408-B
650408-X-B

Pump Specifications

Lower Pump Material 316 Stainless Steel
 Plunger Material 316 Stainless Steel
 Cylinder Material Stainless Steel
 Air Motor 65444-B
 Motor Repair Kit 61268
 Motor Diameter 4-1/4"
 Stroke 4"
 Air Inlet 1/2" NPT(F)
 Lower Pump End Series 65108/65108-X
 Lower Pump Repair Kit 637010 for 650408-B/650408-5-B
 637010-4 for 650408-4-B/650408-6-B
 Material Inlet 1-1/4" NPT(F)
 Material Outlet 3/4" NPT(F)
 Weight 35 lbs. (15.8 kgs.)

Ordering

6 5 0 4 0 8 - B Packings: Teflon (Upper & Lower)
 6 5 0 4 0 8 - X - B

Packings

- 4 : UHMW-PE (Upper & Lower)
- 5 : Teflon, w/Ultra Coated Tube and Rod (Upper & Lower)
- 6 : UHMW-PE, w/Ultra Coated Tube and Rod (Upper & Lower)

Accessories

Air F/R/L: C28241-810
 Wall Mount: 66100
 Airline Oil: 62274
 Muffler: 91790
 Wet Sol: 66333-B

