



S-Series¹ Sepura STERLING oil water separators

flow capacity: 60 - 7000 scfm (100 - 12,000 Nm³/hr)

S¹

S-Series¹ Sepura STERLING oil water separators

flow capacity: 60 - 7000 scfm (100 - 12,000 Nm³/hr)

S¹

Leading edge technology and more than 100 years of **experience**...nano-purification solutions, your world-class provider of state-of-the-art compressed air and gas solutions to industry.

Our commitment at n-psi is to work alongside our **customers** and provide unique solutions with the highest quality products to solve your specific challenges.

A wealth of experience and leading edge products are only part of the equation. n-psi realize that world-class customer **service** is the most important component to any successful business.

Experience. Customer. Service... **n-psi**



Clean and Clear

A typical compressed air or gas system produces thousands of gallons of oil contaminated condensate every year. Collecting, storing and disposing of this oily condensate is messy and expensive.

n-psi understands your needs and has created the range of high-performance Sepura oil water separators to remove oil and other contaminants from your condensate allowing you to dispose of it safely and inexpensively. Sepura lets you stop paying for condensate disposal with this simple and cost effective approach to condensate treatment.



Design

Our experienced team of design engineers are always looking for new and unique technologies and products to bring you the highest level of performance and lowest overall operating cost.



Research & Development

Our R&D team endeavor to provide solutions that go beyond developing an existing product. They are continually researching new technologies which can provide unique advantages over competitive offerings.



Manufacture

The reliable and cost effective Sepura oil water separators are manufactured in a state of the art facility to the highest standards of build quality to ensure reliability and high levels of performance.

nano S-Series¹ oil water separators

A typical compressed air and gas system can produce thousands of gallons of condensate per year. This condensate may be as much as 99.9% pure water - so why pay thousands of dollars per year to dispose of water when you can clean it simply and effectively and pour it down the drain? The nano Sepura range of oil water separators remove the oil from the water in your condensate so you can dispose of it cleanly and safely, drastically reducing your condensate disposal costs.

The S-Series¹ is not your typical oil water separator. It's advanced design and unique environmentally friendly STERLING oil absorbing filtration media takes separation technology to a whole new level. No messy carbon bags. No settling tanks full of untreated condensate. No external oil collection containers. Just simple and effective condensate treatment.

nano Sepura oil water separators reliably give you:

- 100% performance - even on newer synthetic compressor lubricants*
- Lower life cycle costs - long media life and simplified maintenance
- Lower outlet concentrations - down to 5 ppmv or less
- Space saving - smaller footprint for easier installation
- Environmentally friendly recycled materials
- Treatment for systems up to 10,000 scfm with a single unit
- Peace of mind - the most reliable product of its kind

The Sepura range of oil water separators are a reliable and cost-effective solution to the problem of contaminated condensate.



benefits - get more for your money

Guaranteed Performance

- The advanced STERLING filtration media provides long media life and outlet concentrations as low as 5 ppmv even with synthetic compressor lubricants*, and all without the size, weight and mess of a settling tank, bags of carbon, or oil collection container.

Easy to Size

- No complex sizing tables and charts
- Size your unit on just your air or gas flow
- Fit applications up 10,000 scfm with a single unit

Easy to Install

- Package includes everything you need for installation
- Ready for use - no pre-soaking!
- Small footprint for tight installations
- Multiple inlet connections for multiple drain points

Easy to Maintain

- Service intervals up to two years
- Quick release lids for easy access
- No special tools required
- No settling tank to empty and clean
- No funnels to adjust
- No pre-soaking of media bags
- Replace the media in less than 15 minutes
- No oil collection container to dump & clean

Environmentally Friendly Design

- 100% recycled (and recyclable) filtration media
- Environmentally sustainable manufacturing practices

High Quality Construction

- Single piece molded body 100% tested for zero leaks

Warranty

- Peace of mind - The SEP 120 through SEP 1800 come standard with a 10 year warranty! Conditions apply.



* For use with PAG compressor lubricants contact support@n-psi.com.

nano S-Series¹ oil water separators

Advanced STERLING filter media

Traditional oil water separators use activated carbon which is messy and requires pre-soaking, a long contact time, and frequent replacement. The nano Sepura range is a new approach to oil water separation using a new, advanced, proprietary, non-carbon based media that attracts oil and repels water - it's as simple as that. Scan this tag with your mobile device to watch a video demonstrating the incredible oil separation capabilities of the STERLING media.



Unrivalled performance - even on synthetic oils

Traditional separators rely on settling tanks - waiting for the oil to float on top of the water. Many synthetic oils won't settle out due to having a specific gravity very similar to water. Pressurized timed solenoid drains compound the problem as they emulsify the oil water condensate prior to reaching the separator. The Sepura oil water separators don't rely on a settling tank.

Easy to size

Sizing a traditional separator often requires that you consider condensate flow while accounting for ambient conditions, compressor type, oil type, pressures, temperatures, and other equipment. The Sepura oil water separators can be sized quickly and easily based on just the air or gas flow. Nothing else!

Easy to install

The settling tank on a traditional separator makes the unit big and heavy requiring valuable floor space that must be level for the unit to perform correctly. The Sepura oil water separators don't need a settling tank and use less floor space, so they can fit where you need them to. In addition, unlike carbon, the STERLING media bags require no pre-soaking - your separator is ready to use, right out of the box.

Easy to maintain

Unlike the traditional heavy, dusty bags of activated carbon that need to be pre-soaked, the technologically advanced STERLING filter media comes in clean, lightweight, easy to handle bags, that require no pre-soaking for quick and simple media replacement. Additionally, there is no settling tank to clean, and no oil collection container to empty. The oil is trapped in the filters for easy disposal.




SEP 60: for smaller flow applications



SEP 1800: two towers in parallel




SEP 3500 & 7000: high flow capacity

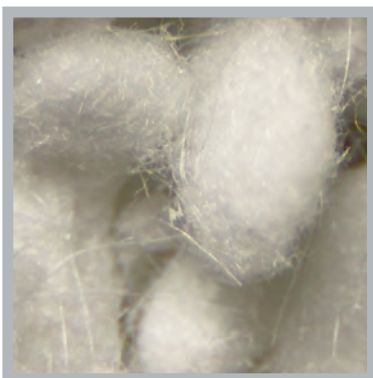

Uses advanced STERLING filter media




Replacement media for any brand

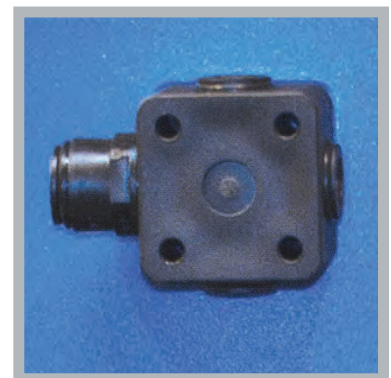

Multiple threaded inlet connections

The nano Sepura range of oil water separators use a technologically advanced proprietary filtration media to separate oil from water in the condensate discharged from compressed air and gas systems. This non-carbon based and 100% recycled media actively absorbs oil while repelling water, resulting in clean condensate that can be disposed of cleanly and inexpensively.

Condensate from compressors, refrigeration dryers, coolers, filters, or any other drain points are piped directly to the Sepura oil water separator. Here it passes directly into the primary filter which provides three critical functions:

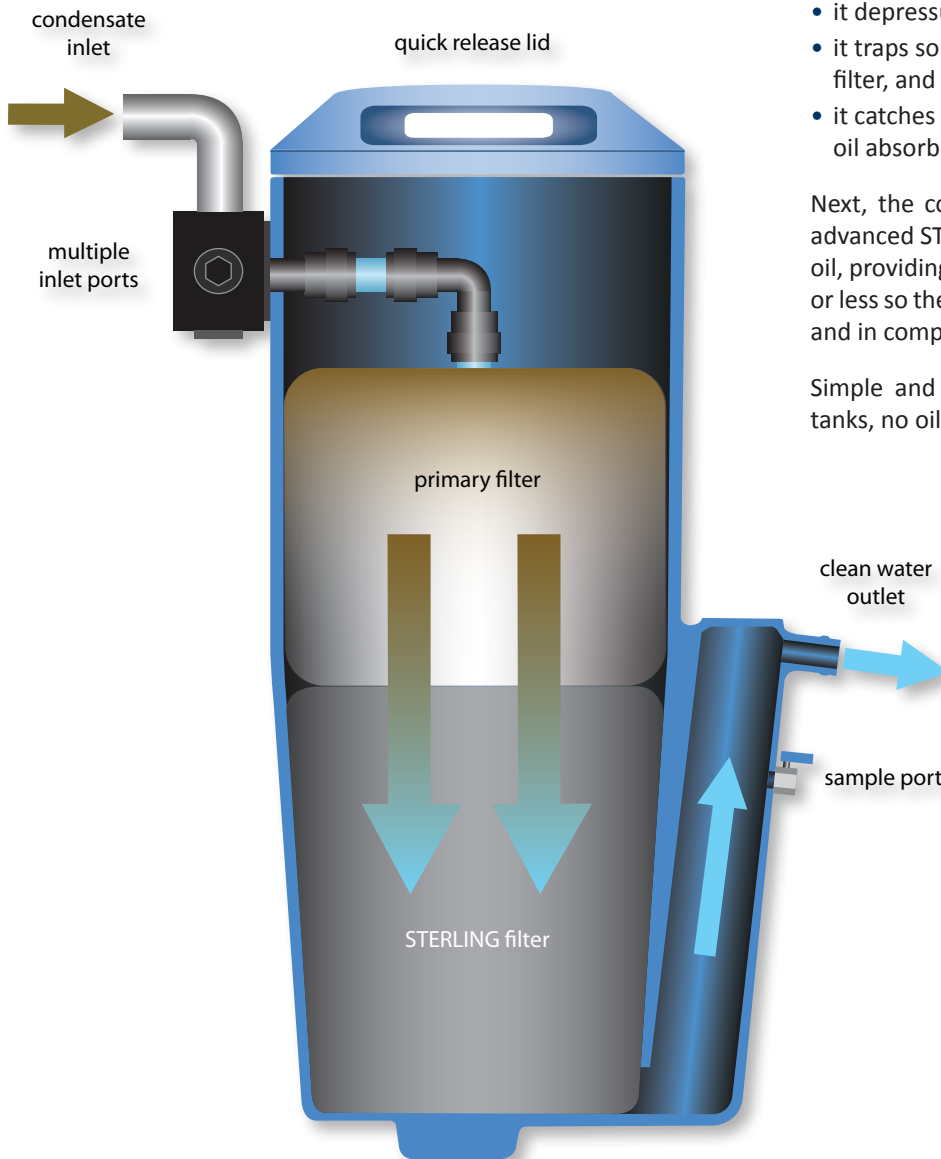

- it depressurizes the condensate,
- it traps solid particles protecting the secondary filter, and
- it catches bulk hydrocarbons within a high capacity oil absorbent.

Next, the condensate passes through a deep bed of advanced STERLING filtration media which absorbs the oil, providing outlet oil concentrations down to 5 ppmv or less so the remaining water can be disposed of safely and in compliance with environmental regulations.

Simple and effective - no messy carbon, no settling tanks, no oil containers. Simply clean condensate.

simply clean
condensate

Environmentally friendly materials & manufacturing

The Sepura range is not only technologically advanced, it is also environmentally friendly. Unlike carbon used in traditional separators, STERLING filter media is made from 100% recycled materials using environmentally sustainable manufacturing techniques. Separating your condensate is good for the environment. Using recycled materials to do it... even better.




sizing & specifications


Separator Model	Inlet	Outlet	Rated Flow ⁽²⁾		Dimensions (inches)			Approx. Weight	Replacement Media Kit
	NPT/PTC ⁽¹⁾	NPT/PTC ⁽¹⁾	scfm	Nm ³ /h	A	B	C	lbs	Part No.
SEP 60 ST	1/4" (x1) ⁽¹⁾	3/8" (x1) ⁽¹⁾	60	102	9.4	5.5	5.5	2.9	SEP 60 MRK
SEP 120 ST	1/2" (x4)	3/4" (x1)	120	204	19.7	8.5	10.1	6.0	SEP 120 MRK
SEP 360 ST	1/2" (x4)	3/4" (x1)	360	612	25.8	13.6	11.1	7.9	SEP 360 MRK
SEP 900 ST	1/2" (x4)	3/4" (x1)	900	1529	38.9	17.0	19.5	32.6	SEP 900 MRK
SEP 1800 ST	1/2" (x8)	3/4" (x1)	1800	3058	38.9	38.9	20.5	69.0	SEP 1800 MRK
SEP 3500 ST	3/4" (x2)	3/4" (x1)	3500	5947	39.4	39.4	27.6	319	SEP 3500 MRK
SEP 7000 ST	3/4" (x2)	3/4" (x1)	7000	11,893	39.4	43.3	43.3	467	SEP 7000 MRK

specifications	SEP 60 ST	SEP 120 to 1800	SEP 3500	SEP 7000
expected media life ⁽³⁾	8000 hours @ 30 cfm 5000 hours @ 60 cfm	5000 hours	16000 hours @ 3500 cfm 8000 hours @ 5000 cfm	16000 hours @ 7000 cfm 8000 hours @ 10,000 cfm
maximum oil carry over ⁽⁴⁾	< 20 ppm	< 20 ppm	< 20 ppm	< 20 ppm
warranty	2 years	10 years	2 years	2 years
max condensate inlet pressure	232 psig	232 psig	232 psig	232 psig
inlet condensate temperature range	35 to 110°F	35 to 110°F	35 to 110°F	35 to 110°F


- (1) Inlet and outlet connections on the SEP 60 ST are push to connect. All other models are NPT threaded.
 (2) Sizing assumes an oil flooded compressor using mineral or synthetic lubricant with a maximum oil carry-over of 5 mg/m³ or less.
 (3) Media life decreases with increased condensate flow. For media life estimates at other flow rates contact support@n-psi.com.
 (4) For use with PAG compressor lubricants contact n-psi technical support or email support@n-psi.com.




SEP 60 ST



SEP 120 to 900 ST



SEP 1800 ST

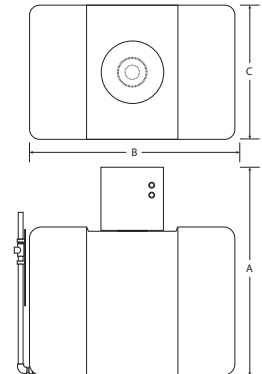

SEP 3500 + 7000 ST

nano Alternative Media Kits

Stop wasting time & money on replacement carbon bags. Carbon is messy, time consuming, provides inconsistent performance, and is bad for the environment. n-psi sells our STERLING Media Replacement Kits to fit virtually all brands of oil water separators. Get the legendary performance of the advanced STERLING filtration technology - even if you own another brand of separator.

The benefits of upgrading to STERLING Media Replacement Kits:

- Twice the oil holding capacity of carbon - longer life
- Half the contact time as carbon - higher flow capacity
- Clean, light, dust free, and easier to handle, install & remove
- No pre-soaking - save 12-24 hours during start up & replacement
- Doesn't settle, crush or fracture - consistent performance
- 100% recycled & recyclable material - environmentally friendly

Contact us before your next change-out.



Scan this tag with your mobile device to watch a video demonstrating the incredible oil separating capabilities of the STERLING media.

nano-purification solutions
 11330 Vanstory Drive
 Huntersville, NC 28078
 USA

Tel: (704) 897-2182
 Fax: (704) 897-2183
 Email: support@n-psi.com
 web: www.n-psi.com

