



truck



automotive



industrial



wood

TRUCK & LARGE EQUIPMENT BOOTHS




SHOWN WITH PRESSURIZED AIR APPLICATION



SHOWN WITH POWDER COATED WHITE OPTION

STRENGTHENING BOOTH INTEGRITY.

Col-Met has enhanced the overall design and structure of our larger-size spray booths for vehicle, large equipment, and other high-capacity industrial finishing applications. In addition to using structural-steel vertical members every 10 feet of length, we also span between the members with 14-gauge horizontal stiffening panels for the entire length of the booth. The booth support structural steel is powder coated with our standard TGIC polyester white for a professional "Fit and Finish" look that Col-Met customers have come to expect.

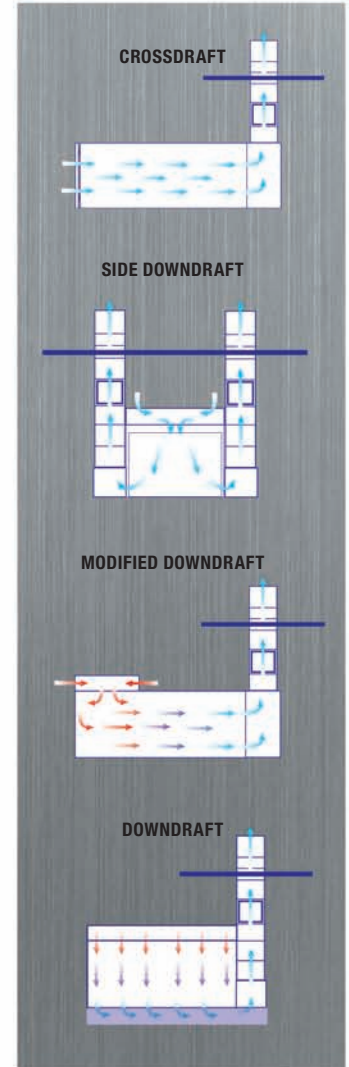

STANDARD BOOTH FEATURES

- Industry-leading, W6x9 steel vertical members allow the booth to accept standard manlifts without upgrades or upcharges
- Structurally-sound steel helps eliminate the "oil canning" effect
- Bright, full booth illumination is provided by UL listed, four-tube, 32-watt, fluorescent light fixtures
- "Anywhere placement" of personnel doors and light fixtures
- 5/16" bolts versus industry-standard 1/4" bolts for tighter, more secure bolting
- Powder-coated structural steel members
- Adjustable slotted door hinges
- Optional powder coating available
- Booth design offers a substantial savings during installation - taking up to 25% less time to complete the job



COL-MET SPRAY BOOTHS COMPLY WITH ALL APPLICABLE OSHA AND NFPA REGULATIONS.

TRUCK & LARGE EQUIPMENT BOOTHS

CLASSIC CROSSDRAFT TRUCK & LARGE EQUIPMENT BOOTHS

Model Number	Interior Dimensions			Exterior Dimensions			Access Doors	Nominal Door Opening				Illumination			Air Flow SCFM	Fan Spec.		Filters	
	Width	Height	Length	Width	Height	Length		Width	Height	Qty	Type	S&G	Open	Total		Dia.	HP	Int.	Exh.
TCC34SB	16'-0"	16'-0"	34'-0"	17'-0"	16'-6"	34'-4"	1	11'-4"	13'-10.5"	1	Filter	2	22	24	25,600	42"	7.5 HP	48	48
TCC34RF	16'-0"	16'-0"	34'-0"	17'-0"	16'-6"	34'-4"	1	11'-4"	13'-10.5"	1	Solid	2	22	24	25,600	42"	7.5 HP	48	48
TCC34DT	16'-0"	16'-0"	34'-0"	17'-0"	16'-6"	34'-4"	1	11'-4"	13'-10.5"	2	1 of ea.	2	22	24	25,600	42"	7.5 HP	48	48
TCC44SB	16'-0"	16'-0"	44'-0"	17'-0"	16'-6"	44'-4"	2	11'-4"	13'-10.5"	1	Filter	4	28	32	25,600	42"	7.5 HP	48	48
TCC44RF	16'-0"	16'-0"	44'-0"	17'-0"	16'-6"	44'-4"	2	11'-4"	13'-10.5"	1	Solid	4	28	32	25,600	42"	7.5 HP	48	48
TCC44DT	16'-0"	16'-0"	44'-0"	17'-0"	16'-6"	44'-4"	2	11'-4"	13'-10.5"	2	1 of ea.	4	28	32	25,600	42"	7.5 HP	48	48
TCC54SB	16'-0"	16'-0"	54'-0"	17'-0"	16'-6"	54'-4"	3	11'-4"	13'-10.5"	1	Filter	6	34	40	25,600	42"	7.5 HP	48	48
TCC54RF	16'-0"	16'-0"	54'-0"	17'-0"	16'-6"	54'-4"	3	11'-4"	13'-10.5"	1	Solid	6	34	40	25,600	42"	7.5 HP	48	48
TCC54DT	16'-0"	16'-0"	54'-0"	17'-0"	16'-6"	54'-4"	3	11'-4"	13'-10.5"	2	1 of ea.	6	34	40	25,600	42"	7.5 HP	48	48
TCC64SB	16'-0"	16'-0"	64'-0"	17'-0"	16'-6"	64'-4"	4	11'-4"	13'-10.5"	1	Filter	8	40	48	25,600	42"	7.5 HP	48	48
TCC64RF	16'-0"	16'-0"	64'-0"	17'-0"	16'-6"	64'-4"	4	11'-4"	13'-10.5"	1	Solid	8	40	48	25,600	42"	7.5 HP	48	48
TCC64DT	16'-0"	16'-0"	64'-0"	17'-0"	16'-6"	64'-4"	4	11'-4"	13'-10.5"	2	1 of ea.	8	40	48	25,600	42"	7.5 HP	48	48

MODIFIED DOWNDRAFT TRUCK & LARGE EQUIPMENT BOOTHS

Model Number	Interior Dimensions			Exterior Dimensions			Access Doors	Nominal Door Opening				Illumination			Air Flow SCFM	Fan Spec.		Filters	
	Width	Height	Length	Width	Height	Length		Width	Height	Qty	Type	S&G	Open	Total		Dia.	HP	Int.	Exh.
TSC34SB	16'-0"	16'-0"	34'-0"	17'-0"	18'-6"	34'-4"	1	11'-4"	13'-10.5"	1	Solid	2	22	24	25,600	42"	7.5 HP	48	48
TSC34RF	16'-0"	16'-0"	34'-0"	17'-0"	18'-6"	34'-4"	1	11'-4"	13'-10.5"	1	Solid	2	22	24	25,600	42"	7.5 HP	48	48
TSC34DT	16'-0"	16'-0"	34'-0"	17'-0"	18'-6"	34'-4"	1	11'-4"	13'-10.5"	2	Solid	2	22	24	25,600	42"	7.5 HP	48	48
TSC44SB	16'-0"	16'-0"	44'-0"	17'-0"	18'-6"	44'-4"	2	11'-4"	13'-10.5"	1	Solid	4	28	32	25,600	42"	7.5 HP	48	48
TSC44RF	16'-0"	16'-0"	44'-0"	17'-0"	18'-6"	44'-4"	2	11'-4"	13'-10.5"	1	Solid	4	28	32	25,600	42"	7.5 HP	48	48
TSC44DT	16'-0"	16'-0"	44'-0"	17'-0"	18'-6"	44'-4"	2	11'-4"	13'-10.5"	2	Solid	4	28	32	25,600	42"	7.5 HP	48	48
TSC54SB	16'-0"	16'-0"	54'-0"	17'-0"	18'-6"	54'-4"	3	11'-4"	13'-10.5"	1	Solid	6	34	40	25,600	42"	7.5 HP	48	48
TSC54RF	16'-0"	16'-0"	54'-0"	17'-0"	18'-6"	54'-4"	3	11'-4"	13'-10.5"	1	Solid	6	34	40	25,600	42"	7.5 HP	48	48
TSC54DT	16'-0"	16'-0"	54'-0"	17'-0"	18'-6"	54'-4"	3	11'-4"	13'-10.5"	2	Solid	6	34	40	25,600	42"	7.5 HP	48	48
TSC64SB	16'-0"	16'-0"	64'-0"	17'-0"	18'-6"	64'-4"	4	11'-4"	13'-10.5"	1	Solid	8	40	48	25,600	42"	7.5 HP	48	48
TSC64RF	16'-0"	16'-0"	64'-0"	17'-0"	18'-6"	64'-4"	4	11'-4"	13'-10.5"	1	Solid	8	40	48	25,600	42"	7.5 HP	48	48
TSC64DT	16'-0"	16'-0"	64'-0"	17'-0"	18'-6"	64'-4"	4	11'-4"	13'-10.5"	2	Solid	8	40	48	25,600	42"	7.5 HP	48	48

FULL DOWNDRAFT TRUCK & LARGE EQUIPMENT BOOTHS

Model Number	Interior Dimensions			Exterior Dimensions			Access Doors	Nominal Door Opening				Illumination			Air Flow SCFM	Fan Spec.		Filters	
	Width	Height	Length	Width	Height	Length		Width	Height	Qty	Type	S&G	Open	Total		Dia.	HP	Int.	Exh.
TDD30SB	16'-0"	16'-0"	30'-0"	17'-0"	18'-6"	30'-4"	1	11'-4"	13'-10.5"	1	Solid	2	22	24	24,000	42"	10 HP	48	30
TDD30DT	16'-0"	16'-0"	30'-0"	17'-0"	18'-6"	30'-4"	1	11'-4"	13'-10.5"	2	Solid	2	22	24	24,000	42"	10 HP	48	30
TDD40SB	16'-0"	16'-0"	40'-0"	17'-0"	18'-6"	40'-4"	2	11'-4"	13'-10.5"	1	Solid	4	28	32	32,000	(2)42"	5 HP	64	40
TDD40DT	16'-0"	16'-0"	40'-0"	17'-0"	18'-6"	40'-4"	2	11'-4"	13'-10.5"	2	Solid	4	28	32	32,000	(2)42"	5 HP	64	40
TDD50SB	16'-0"	16'-0"	50'-0"	17'-0"	18'-6"	50'-4"	3	11'-4"	13'-10.5"	1	Solid	6	34	40	40,000	(2)42"	7.5 HP	80	50
TDD50DT	16'-0"	16'-0"	50'-0"	17'-0"	18'-6"	50'-4"	3	11'-4"	13'-10.5"	2	Solid	6	34	40	40,000	(2)42"	7.5 HP	80	50
TDD60SB	16'-0"	16'-0"	60'-0"	17'-0"	18'-6"	60'-4"	4	11'-4"	13'-10.5"	1	Solid	8	40	48	48,000	(2)42"	7.5 HP	96	60
TDD60DT	16'-0"	16'-0"	60'-0"	17'-0"	18'-6"	60'-4"	4	11'-4"	13'-10.5"	2	Solid	8	40	48	48,000	(2)42"	7.5 HP	96	60

SIDE DOWNDRAFT TRUCK & LARGE EQUIPMENT BOOTHS

Model Number	Interior Dimensions			Exterior Dimensions			Access Doors	Nominal Door Opening				Illumination			Air Flow SCFM	Fan Spec.		Filters	
	Width	Height	Length	Width	Height	Length		Width	Height	Qty	Type	S&G	Open	Total		Dia.	HP	Int.	Exh.
TSD30SB	16'-0"	16'-0"	30'-0"	21'-4"	18'-6"	30'-4"	1	11'-4"	13'-10.5"	1	Solid	2	22	24	24,000	(2)30"	3 HP	46	46
TSD30DT	16'-0"	16'-0"	30'-0"	21'-4"	18'-6"	30'-4"	1	11'-4"	13'-10.5"	2	Solid	2	22	24	24,000	(2)30"	3 HP	46	46
TSD40SB	16'-0"	16'-0"	40'-0"	21'-4"	18'-6"	40'-4"	2	11'-4"	13'-10.5"	1	Solid	4	28	32	32,000	(4)24"	2 HP	60	60
TSD40DT	16'-0"	16'-0"	40'-0"	21'-4"	18'-6"	40'-4"	2	11'-4"	13'-10.5"	2	Solid	4	28	32	32,000	(4)24"	2 HP	60	60
TSD50SB	16'-0"	16'-0"	50'-0"	21'-4"	18'-6"	50'-4"	3	11'-4"	13'-10.5"	1	Solid	6	34	40	40,000	(4)30"	2 HP	76	76
TSD50DT	16'-0"	16'-0"	50'-0"	21'-4"	18'-6"	50'-4"	3	11'-4"	13'-10.5"	2	Solid	6	34	40	40,000	(4)30"	2 HP	76	76
TSD60SB	16'-0"	16'-0"	60'-0"	21'-4"	18'-6"	60'-4"	4	11'-4"	13'-10.5"	1	Solid	8	40	48	48,000	(4)30"	3 HP	90	90
TSD60DT	16'-0"	16'-0"	60'-0"	21'-4"	18'-6"	60'-4"	4	11'-4"	13'-10.5"	2	Solid	8	40	48	48,000	(4)30"	3 HP	90	90

18' AND 20' WIDE MODELS ALSO AVAILABLE AS WELL AS OTHER CUSTOM SIZES.



Col-Met Spray Booths
 Dallas, TX // e-mail: sales@colmetsb.com
 Toll-free: 888.452.6684 // www.colmetsb.com