

meet & exceed ISO compressed air quality standards



Leading edge technology and hundreds of years of **experience**...nanopurification solutions, your world-class manufacturer of state-of-theart compressed air and gas solutions to industry.

Our commitment at nano is to work alongside our **customers** and provide unique solutions with the highest quality products to solve your specific challenges.

A wealth of experience and leading edge products are only part of the equation. nano recognize that world-class customer **service** is the most important component to any successful business.

# Experience.

Our team is comprised of and supported by individuals spanning all disciplines from research & development, engineering & manufacturing, marketing & sales and service & support. Our backgrounds are in air and gas purification and our experience in this field spans a wide range of industries. We combine this knowledge and experience to ensure our products and services are designed and provided to meet the objectives and expectations of you - our Customer.



# Customer.

We recognize that our Customers are not only our valuable distribution partners who sell and support our products or the machine builders who depend on them as protection for their equipment. They are the contractors who install them, the manufacturers who use them in their processes and the service people who maintain them. At nano we have developed our products, packaging and support materials to ensure they exceed all of our Customers' expectations.



# Service.

At nano-purification solutions we recognize that world-class customer service is the most important component to any successful business. Your business needs to exceed your customers' expectations to stand out from your competitors and our service must positively impact your business so you can be successful in doing so. Our commitment is simple... we will stand behind our products and ensure that our customer service is unrivaled in the industry.



# Experience. Customer. Service...nano





## industrial filters

 $F^1$ 

. F<sup>1</sup>

F1

 $\mathbf{F}^1$ 

 $\mathbf{F}^1$ 

 $F^1$ 

F<sup>2</sup>

F<sup>3</sup>

F<sup>3</sup>

F<sup>4</sup>

F⁵

F<sup>6</sup>

 $\mathbf{P}^1$ 

- centrifugal water separators performance validated filters duplex filters medical sterile filters vacuum pump protection filters medical vacuum filters high capacity flanged filters high temperature dust filters mid pressure aluminum filters high pressure stainless steel filters filter heater combinations
  - mist eliminators

## process filters

- $\mathbf{P}^1$ stainless steel industrial filters P1 sterile air depth filters  $\mathbf{P}^1$ sterile air membrane filters
  - culinary steam filters

## desiccant dryers

**D**<sup>1|2|3</sup> heatless modular dryers  $D^4$ high pressure compact dryers  $D^4$ high pressure dryers **D**<sup>5</sup> heatless twin tower dryers **D**<sup>5</sup> externally heated dryers D⁵ blower purge dryers

## refrigerated dryers

|                | <u> </u> |   |
|----------------|----------|---|
| R <sup>1</sup> |          | cycling refrigerated dryers                 |
| R <sup>2</sup> |          | high temperature cycling dryers             |
| R <sup>2</sup> |          | high temperature direct expansion<br>dryers |
| R³             |          | refrigerated process dryers                 |
| <b>R</b> ⁴     |          | direct expansion refrigerated dryers        |
|                |          |   |

### process chillers C<sup>1</sup>

process chillers

### lab gas CO<sub>2</sub> removal modules L1

lab gas purifier

### nitrogen generators

GEN2 nitrogen generators GEN2<sub>plus</sub> ultra-high purity nitrogen generators membrane nitrogen generators

# breathing air purifiers

| B <sup>1</sup> | breathing air purifiers        |
|----------------|--------------------------------|
| B <sup>1</sup> | breathing air purifier modules |

#### vapor removal V1

NMG

oil vapor removal system

### condensate treatment S<sup>1</sup>

condensate treatment systems

## condensate drains

|   | conde | condensate drams                |  |  |  |  |
|---|-------|---------------------------------|--|--|--|--|
| ٦ | ND    | timed condensate drains         |  |  |  |  |
| 1 | ND    | zero air loss condensate drains |  |  |  |  |



















The ISO 8573 group of international standards is used for the classification of compressed air purity. The standard provides the test methods and analytical techniques for each type of contaminant. The table below summarizes the maximum contaminant levels specified in ISO 8573.1: 2010 for the various compressed air quality classes. Each compressed air classification can be achieved by installing a specific selection of nano products depending upon the required performance.


## specifications

| ISO<br>purity<br>class | solid particles                                |                   |                 |               | wa                    | oil     |                          |
|------------------------|--|-------------------|-----------------|---------------|-----------------------|---------|--------------------------|
|                        | maximum no. of particles per m <sup>3</sup>    |                   |                 | concentration | vapor                 | liquid  | total oil <sup>(1)</sup> |
|                        | 0.1 - 0.5<br>micron                            | 0.5 - 1<br>micron | 1 - 5<br>micron | mg/m³         | pressure<br>dew point | g/m³    | mg/m³                    |
| 0                      | as specified by the equipment user or supplier |                   |                 |               |                       |         |                          |
| 1                      | ≤ 20,000                                       | ≤ 400             | ≤ 10            | -             | ≤ -94°F               | -       | ≤ 0.01                   |
| 2                      | ≤ 400,000                                      | ≤ 6,000           | ≤ 100           | -             | ≤ -40°F               | -       | ≤ 0.1                    |
| 3                      | -  | ≤ 90,000          | ≤ 1,000         | -             | ≤ -4°F                | -       | ≤ 1                      |
| 4                      | -  | -                 | ≤ 10,000        | -             | ≤ 37°F                | -       | ≤ 5                      |
| 5                      | -  | -                 | ≤ 100,000       | -             | ≤ 45°F                | -       | -                        |
| 6                      | -  | -                 | -               | ≤ 5           | ≤ 50°F                | -       | -                        |
| 7                      | -  | -                 | -               | 5 - 10        | -                     | ≤ 0.5   | -                        |
| 8                      | -  | -                 | -               | -             | -                     | 0.5 - 5 | -                        |
| 9                      | -  | -                 | -               | -             | -                     | 5 - 10  | -                        |


(1) all forms of oil including liquids, aerosols and vapor

## nano product selection

| ISO purity class | solid particles                    | water                  |         | oil         |  |  |
|------------------|------------------------------------|------------------------|---------|-------------|--|--|
| 0                | as agreed by the customer and nano |                        |         |             |  |  |
| 1                | F1 NWS + M1 + M01                  | D <sup>1 2 3 4 5</sup> | ≤ -94°F | F1 AC - NVR |  |  |
| 2                | F1 NWS + M1                        | D <sup>1 2 3 4 5</sup> | ≤ -40°F | F1 M01      |  |  |
| 3                | F1 NWS + M1                        | D <sup>1 2 3 4 5</sup> | ≤ -4°F  | -           |  |  |
| 4                | F1 NWS + M1                        | R <sup>1 3 4</sup>     | ≤ 37°F  | -           |  |  |
| 5                | F1 NWS + M1                        | R <sup>1 3 4</sup>     | ≤ 45°F  | -           |  |  |
| 6                | F1 NWS + M5                        | R <sup>1 2 3 4</sup>   | ≤ 50°F  | -           |  |  |
| 7                | F1 NWS + M25                       | n/a                    |         | -           |  |  |
| 8                | F1 NWS                             | n/a                    |         | -           |  |  |
| 9                | F1 NWS                             | n/a                    |         | -           |  |  |

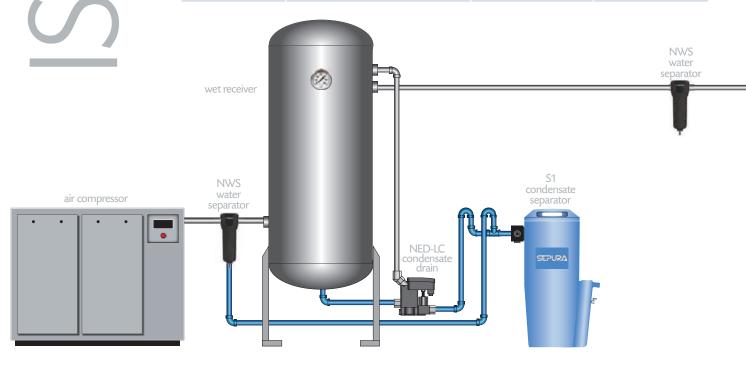


) air guz

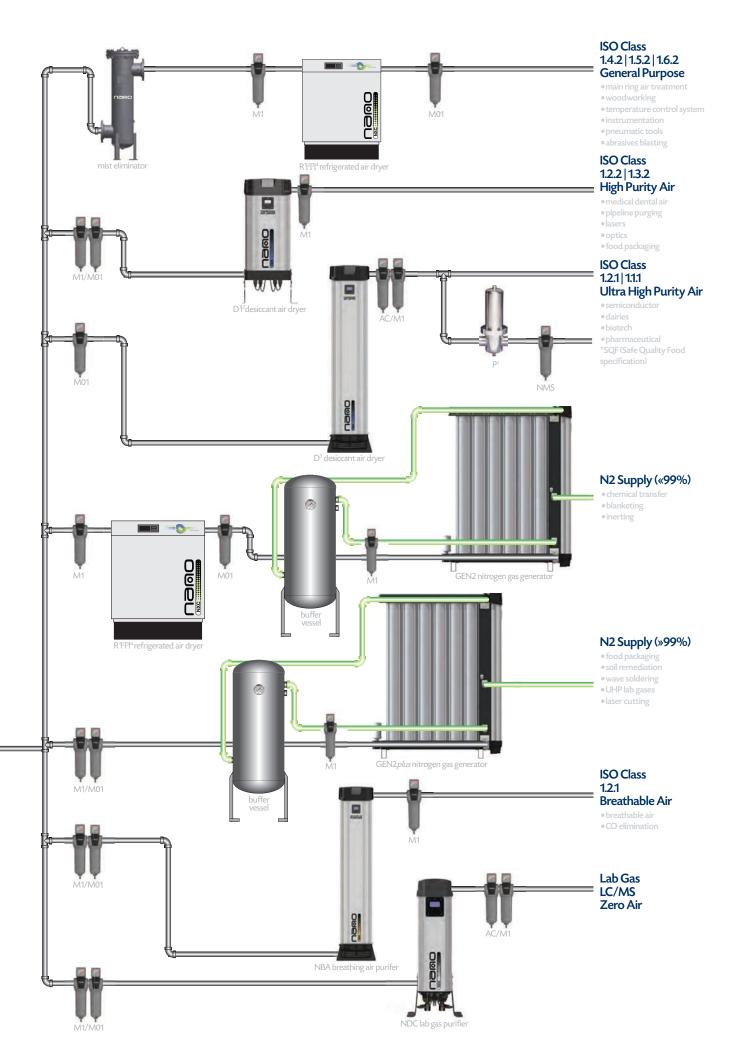

#### Filter Element Validation

Filter element performance has been tested to international standard ISO 12500, to provide filtered compressed air to ISO 8573-1 (the international standard for compressed air quality). The result has been verified by IBR, an accredited independent laboratory.



#### **Filter Housing Validation**

Filter housings are manufactured and tested to meet the requirements of the Pressure Equipment Directive (97/23/EC). This has been independently verified and validated for performance by Lloyd's Register.



Notified Body (97/23/EC) Lloyd's Register EMEA - Notified Body No 0038. 71 Fenchurch Street, London, EC3M 4BS. England

For a copy of the test reports and validation certificates please contact us at support@n-psi.com or download them from www.n-psi.com.



nano-purification solutions 5509 david cox road charlotte, nc 28269 usa

tel: 704.897.2182 fax: 704.897.2183 email: support@n-psi.com web: www.n-psi.com



copyright PURIFICATION SOLUTIONS LLC publication reference n-psi-ISO-01-us