



# Continuous Flow Breathing Air Purifiers

CATALITE® CBA SERIES



## **DEDICATED TO EXCELLENCE...**

Since 1948, compressed air users around the world have relied on Hankison to provide innovative compressed air treatment solutions for critical applications.

Hankison maintains a long standing reputation for manufacturing products that deliver superior performance, time proven reliability and optimal energy savings.

Hankison today is the preferred choice for providing clean, dry compressed air for the most challenging industries.



## CATALITE® BREATHING AIR PURIFIERS...

### SAFETY IN THE WORK PLACE

#### Maintain Health and Safety Requirements

The CATALITE CBA Series delivers breathing air quality in accordance to international standards.

**OSHA:** CFR1910.134

*(Occupational Safety & Health Association)*

**CSA:** Z180.1-00

*(Canadian Standards Association)*

**CGA:** G-7

*(Compressed Gas Association)*

**ANSI:** Z88.2-1080

*(American National Standards Institute)*

Environmental safety standards mandate the need for a suitable air supply to ensure worker safety. CATALITE CBA Breathing Air Purifiers enable industries meet required standards.

### PETROCHEMICAL

The oil and gas industries select CATALITE breathing air purifiers to protect workers from the inhalation of hazardous fumes, gases, and vapors inherent in the manufacturing process.

### ASBESTOS ABATEMENT

Asbestos was a commonly used insulation material for old dwellings. CATALITE Breathing Air Purifiers provide suitable breathing air to workers in asbestos abatement applications.

### PAINT SPRAY

Automotive body shops utilize atomized paint to spray vehicles. Workers exposed to airborne paint emissions benefit from CATALITE Breathing Air Purifiers.


### PROTECTIVE COATINGS

Manufacturers utilize compressed air to apply protective coatings. Airborne compounds will not adversely affect workers when respiratory air is supplied with CATALITE Breathing Air Purifiers.


### CONFINED SPACES

The quality of breathing is critical in confined space industries. Mining, vats, tanks, boilers, ships' hulls, and grain storage facilities are environments with stale, contaminated air that is unsuitable for breathing.

### OPTIONAL SENSATHERM® ENERGY SAVINGS

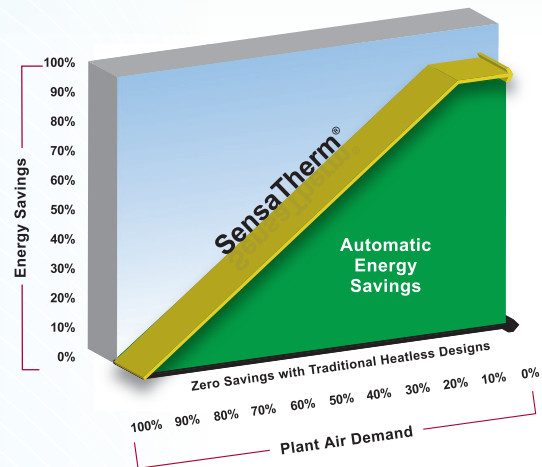

The optional SensaTherm energy management system automatically matches purge air requirements to real time load on the dryer. When operating at reduced capacity, the on-line drying tower remains active until the full drying capacity of the desiccant material is utilized. Each tower is precisely controlled to manage drying times to reduce purge air consumption.



## OPTIMAL PERFORMANCE AND OPERATION...

### SIX STAGE FILTRATION

#### Stage ①

General purpose filter removes solid and liquid contaminants down to 1.0 micron.

#### Stage ②

High efficiency oil removal filter captures liquid aerosols and sub-micronic particles down 0.01 micron.

#### Stage ③

Pressure-swing regenerative desiccant dryer removes water vapor to ensure the effectiveness of the catalyst bed.

#### Stage ④

Dried air travels through a catalytic converter reducing CO concentrations by converting CO to CO<sub>2</sub>

#### Stage ⑤

Particulate removal filter collects contaminants 1.0 micron and larger from the purified air stream.

#### Stage ⑥

Activated carbon filter removes oil vapor, trace odors and other gases normally absorbable by activated carbon.



## FOR QUALITY BREATHING AIR...

### PURIFICATION CAPABILITIES

Contaminants <i>mg/m<sup>3</sup></i>	Maximum Allowable Concentration		Purifier Outlet Rated Conditions
	OSHA <sup>1</sup>	CSA	
Carbon Monoxide (CO)	10	5	95% Conversion <sup>5</sup>
Carbon Dioxide (CO <sub>2</sub> )	1000	500	<sup>2</sup>
Oil (Condensed Hydrocarbons)	5	1	0
Oil Vapor (Gaseous Hydrocarbons)	—	—	<.02 <sup>3</sup>
Odor	Lack of noticeable odor		— <sup>4</sup>

<sup>1</sup> OSHA Standard references CGA (Compressed Gas Association) pamphlet G-7.1, Grade D and is generally consistent with those published by ANSI

<sup>2</sup> CO is converted to CO<sub>2</sub> by the purifier and added to the concentration of CO<sub>2</sub> already present (normal atmospheric air contains 314 mg/m<sup>3</sup> of CO<sub>2</sub>) Although some CO<sub>2</sub> is absorbed in the desiccant beds, high concentrations of CO in the system and/or high concentrations of CO<sub>2</sub> at the compressor intake could result in exceeding allowable CO<sub>2</sub> limits

<sup>3</sup> Will remove only those gaseous hydrocarbons normally adsorbed by activated carbon. Outlet concentration is expressed as methane equivalent, Activated carbon will not remove methane

<sup>4</sup> Will remove only those odors normally adsorbed by activated carbon

<sup>5</sup> 95% Conversion example ( 200 mg/m<sup>3</sup> @ inlet = 10 mg/m<sup>3</sup> @ outlet)

Excessive contamination of intake air to the compressor will adversely affect performance of the purifier.

CATALITE Breathing Air Purifiers remove moisture, solid particles, oil aerosols and mists, carbon monoxide, and hydrocarbon vapors commonly present in compressed air resulting in air which can be safely used by supplied-air breathing devices such as masks, hoods and helmets.

### BREATHING AIR ANALYZERS

#### OSHA maximum concentrations for breathing air:

- 10 mg/m<sup>3</sup> of Carbon Monoxide (CO)
- 1,000 mg/m<sup>3</sup> of Carbon Dioxide (CO<sub>2</sub>)
- 5 mg/m<sup>3</sup> Oil (Condensed Hydrocarbons)

Breathing air system performance is subject to excessive intake of air contaminants. It is important that breathing air systems are routinely monitored for proper operation. The CATALITE CBA Series Breathing Air Purifier can be monitored using several air analyzing options.

#### Carbon Monoxide (CO) Monitor

##### Recommended

- Digital readout of CO concentration
- Visual and audible alarm
- Adjustable high & low alarms with indication
- Contacts for remote alarm
- Push-to-test button
- Alarm silence switch
- Simple calibration



#### Analyzer Choices:

##### Additional Option

- Multiple alarm capabilities
  - » CO & oxygen
  - » CO & dew point
  - » CO, oxygen & dew point



## FEATURES AND OPTIONS



### ① Filtration & Monitoring

- Pre-filtration removes solids and oils
- After-filters collect remaining particles and adsorb vapor
- CO catalyst converter
- Air sample ports for optional analyzer installation

### ② Moisture Indicator

- Visual color change

### ③ Pressure Gauges

- Left / right tower
- Inlet / outlet purifier
- Purge pressure

### ④ Standard Controller

- NEMA 4/4X with critical LED indicators
- Soft on / off switch with two power recovery modes
- Switching failure alarms
- Adjustable service indications
- Tower / valve status LEDs
- Voltage free common alarm contacts
- RS-232 communications port

### OPTIONS

- Nema 7 electrical rating
- Copper, brass or stainless steel instrument tubing and fittings
- SSPC-SP10 sandblast & epoxy paint
- Breathing air analyzers

### Advanced Controls Featuring:

- Vacuum fluorescent text display
- Automatic SensaTherm® energy savings
- Calibration-free temperature sensors
- High inlet temperature & low inlet pressure alarms

## CBA SERIES SPECIFICATIONS...

Model	Inlet Flow <sup>1</sup>		Outlet Flow <sup>1</sup>		Voltages V/ph/Hz	In / Out Connection	H		Dimensions W		D		Weight		
	scfm	nm <sup>3</sup> /h	scfm	nm <sup>3</sup> /h			in	mm	in	mm	in	mm	lbs	kg	
<b>CBA 15</b>	18	31	15	26	85-264/1/47-63 AC 11.5-28 V DC	0.50	49	1244	35	889	35	889	440	200	
<b>CBA 25</b>	30	51	25	42		0.50	49	1244	35	889	35	889	450	204	
<b>CBA 35</b>	42	71	35	59		0.75	49	1244	35	889	35	889	455	206	
<b>CBA 50</b>	60	102	50	85		1.0	64	1626	35	889	35	889	560	254	
<b>CBA 75</b>	90	153	75	127		1.0	79	2006	37	940	35	889	700	318	
<b>CBA 95</b>	114	194	95	161		1.0	57	1448	50	1270	41	1041	820	372	
<b>CBA 135</b>	162	275	135	229		1.0	57	1448	50	1270	41	1041	820	372	
<b>CBA 205</b>	246	418	205	348		1.5	75	1905	56	1422	43	1092	1190	540	
<b>CBA 305</b>	366	622	305	518		2.0	65	1651	62	1575	51	1295	1405	637	
<b>CBA 375</b>	450	765	375	637		2.0	73	1854	66	1676	51	1295	1560	708	
<b>CBA 490</b>	590	1002	490	833		CONSULT FACTORY									
<b>CBA 625</b>	750	1274	625	1062											
<b>CBA 775</b>	930	1580	775	1317											
<b>CBA 940</b>	1130	1920	940	1597											

<sup>1</sup> Flow capacity rated at CAGI conditions: 100 psig (7.0 bar) and 100°F (38°C) saturated inlet

### Capacity Correction Factors

Inlet Pressure		100°F	105°F	110°F	115°F	120°F
psig	bar	38°C	40°C	43°C	46°C	49°C
60	4.2	0.65	0.64	0.62	0.60	0.58
70	4.9	0.74	0.73	0.71	0.69	0.66
80	5.6	0.83	0.81	0.80	0.77	0.74
90	6.3	0.91	0.89	0.87	0.85	0.81
100	7.0	1.00	0.98	0.96	0.93	0.89
110	7.7	1.04	1.02	1.00	0.97	0.93
120	8.4	1.08	1.06	1.04	1.00	0.96
130	9.1	1.12	1.10	1.08	1.04	1.00
140	9.8	1.16	1.14	1.11	1.08	1.03
150	10.5	1.20	1.18	1.15	1.12	1.07

### CAPACITY CORRECTION FACTORS

To adjust CATALITE® capacity for conditions other than rated, use the correction factors (multipliers) for inlet air temperature and pressure shown below.

**Example:** What is the capacity of a 205 scfm (348 nm<sup>3</sup>/h) model when the compressed air at the inlet is 130 psig (9 bar) and 110°F (43°C)?

**Answer:** 205 scfm (348 nm<sup>3</sup>/h) (rated flow from Product Specifications Table) x 1.08 (correction factor for inlet air temperature and pressure) = 221 scfm (375 nm<sup>3</sup>/h).

### Replacement Filter Elements

Prefilters		Catalyst Cartridge	Afterfilters	
Grade 7	Grade 3		Grade 1	Grade 6
HF7-12-4-DGL	HF3-12-4-DGL	CC0	HF1-12-4	HF6-12-4-G
HF7-16-4-DGL	HF3-16-4-DGL	CC0	HF1-16-4	HF6-16-4-G
HF7-20-4-DGL	HF3-20-4-DGL	CC0	HF1-20-4	HF6-20-4-G
HF7-20-4-DGL	HF3-20-4-DGL	CC1	HF1-20-4	HF6-20-4-G
HF7-24-8-DGL	HF3-24-8-DGL	CC1	HF1-24-8	HF6-24-8-G
HF7-28-8-DGL	HF3-28-8-DGL	CC2	HF1-28-8	HF6-28-8-G
HF7-28-8-DGL	HF3-28-8-DGL	CC2	HF1-28-8	HF6-28-8-G
HF7-32-12-DGL	HF3-32-12-DGL	CC3	HF1-32-12	HF6-32-12-G
HF7-36-12-DGL	HF3-36-12-DGL	CC4	HF1-36-12	HF6-36-12-G
HF7-40-16-DG	HF3-40-16-DG	CC5	HF1-40-16	HF6-40-16-G
HF7-44-20-DG	HF3-44-20-DG	CC6	HF1-44-20	HF6-44-20-G
HF7-48-20-DG	HF3-48-20-DG	CC7	HF1-48-20	HF6-48-20-G
HF7-54-24-G	HF3-54-24-G	CC8	HF1-54-24	HF6-54-24-G
HF7-56-24-G	HF3-56-24-G	CC9	HF1-56-24	HF6-56-24-G



## Global locations

### SPX USA

#### Hankison Headquarters

1000 Philadelphia Street  
 Canonsburg, PA 15317-1700 USA  
 P: (724) 745-1555  
 F: (724) 745-6040  
 E: [hankison.sales@spx.com](mailto:hankison.sales@spx.com)

#### Hankison Rental Northeast

100 Commerce Drive, Suite 40  
 Washington, PA 15301  
 P: (724) 225-1470  
 F: (724) 222-1317  
 E: [rentaldryers@dehydration.spx.com](mailto:rentaldryers@dehydration.spx.com)

#### Hankison Rental Southwest

1486 Champion Drive  
 Terrell, TX 75160 U.S.A.  
 P: (800) 379-3711  
 F: (972) 563-9991  
 E: [rentaldryers@dehydration.spx.com](mailto:rentaldryers@dehydration.spx.com)

### SPX Canada

#### Hankison Canada

1415 California Avenue  
 Brockville, ON, Canada K6V 7H7  
 T: (800) 267-3884  
 F: (800) 318-0952  
 E: [hankison.sales@spx.com](mailto:hankison.sales@spx.com)

### SPX South America

#### Hankison Brazil

Rua Joao Daprat, 231 b  
 09600-010-SÃO Bernardo Do Campo, SP  
 Brazil  
 T: +55 (11) 2166-4050  
 F: +55 (11) 2166-4070

### SPX Europe

#### Hankison Ireland

Killarney, Co Kerry  
 Ireland  
 T: (+353) 6466-33322  
 F: (+353) 6466-33371

#### Hankison Netherlands

Munnikenheiweg 41  
 Postbus 570  
 4870 NE Etten-Leur  
 Netherlands  
 T: (+31) 76-5085800  
 F: (+31) 76-5085800

#### Hankison Germany

Konrad-Zuse-Str. 25  
 D-47445 Moers Germany  
 T: (+49) 2841-8190  
 F: (+49) 2841-87112  
 E: [csc@dehydration.spx.com](mailto:csc@dehydration.spx.com)

### SPX India

SPX India PVT, LTD  
 Manufacturing G-72/73  
 Riico Industrial Area  
 Mansarovar, RAJASTHAN  
 Jaipur 302 020  
 India  
 T: (+91) 141-2396759  
 F: (+91) 141-2395048

### SPX Asia Pacific

#### SPX China

5th Floor, Park Center,  
 No.1568 Huashan Road, Shanghai China  
 T: +86 (021) 2208-5840  
 F: +86 (021) 2208-5866

#### SPX Korea

#940-1 Yerim-Ri  
 Jeonggwan-Myeon  
 Gijang-Gun  
 Busan  
 Rep. of Korea  
 T: +82 (51) 728-5360  
 F: +82 (51) 728-5359

Based in Charlotte, North Carolina, SPX Corporation (NYSE: SPW) is a global Fortune 500 multi-industry manufacturing leader.

For more information, please visit [www.spx.com](http://www.spx.com)

### SPX FLOW TECHNOLOGY

1000 Philadelphia Street  
 Canonsburg, PA 15317-1700 USA  
 P: (724) 745-1555  
 F: (724) 745-6040  
 E: [hankison.sales@spx.com](mailto:hankison.sales@spx.com)

SPX reserves the right to incorporate our latest design and material changes without notice or obligation. Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. For more information visit [www.spx.com](http://www.spx.com). The green ">" is a trademark of SPX Corporation, Inc.